





PRICE LIST 2020

The prices shown in this Blupura catalogue are net of VAT, ex-works Italy. Blupura reserves the right to alter products and prices at its own discretion, without notice.

Water, always ready to be dispensed into glasses, bottles or flasks, at home, in the office, in bars, restaurants, canteens, and any public space. Making all of this possible through water coolers that are on the cutting edge in terms of their construction, performance, design and respect for the environment – this is the task we set ourselves.



Drinking water is vital. Drinking water from the mains supply helps the environment – this was the start of our mission.

"Water and the resources of the Earth are the most precious assets that humanity possesses. And their future depends on the choices that we all make, both as entrepreneurs and as citizens of this planet.

Drinking water from the mains water supply, for example, is in itself an economically intelligent choice, and one that is also important for the environment, in terms of reducing the impact of plastic bottles on the ecosystem. But even if this becomes the standard way to consume drinking water, it will still not be sufficient.

When we founded Blupura, it was our conviction that we could make a difference by offering the market better, greener water coolers that gave us the impetus to pursue this adventure. We were the first on the global market to use natural refrigerant gases to eliminate the impact of our machines on global warming.

And, using this decision to respect the environment as our launch pad, we wanted to demonstrate the same respect for all of our customers and the users of our water coolers, offering them nothing but units with unrivalled standards of construction, performance, functionality, ergonomics and design. All, naturally, made in Italy from start to finish.

Today, our water coolers dispense water in restaurants, offices, homes and public spaces throughout the world. And we have a plethora of ideas for the future..."








Pioneers in the use of natural gases, passionate about total quality, and even more demanding than our customers.

R290 NATURAL GAS zero impact on global warming FIRST ON THE MARKET

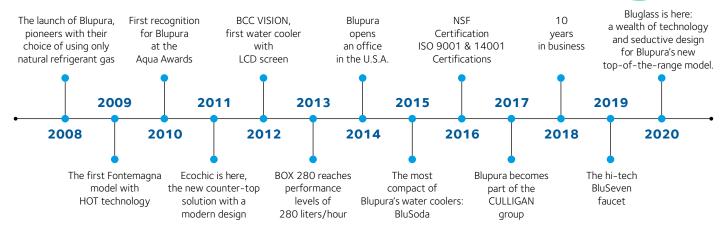



Blupura is the only manufacturer of water coolers to be named by Greenpeace in the latest Cool Technology Reports!

Blupura is extremely proud of being the only water cooler manufacturer to appear on Greenpeace's www.cooltechnologies.org website and in its "Cool Technologies: working without HFCs" report, which lists the companies that are leading the way, right around the world, in terms of the use of cooling technologies that do not rely on hydrofluorocarbons (HFCs), which are considered to be among the main contributors to global warming.



These are the aspects of our approach that have allowed us to garner an enviable worldwide reputation.

Aqua Awards 2019, Berlin

first prize Best Marketing Campaign Best Environmental Practice Best Promotion of Health and Hydration Best Service Person second prize Best Product Innovation

Aqua Awards 2018, Dublin first prize

Best Website second prize Best Environmental Practice Best Product innovation

Aqua Awards 2017, Krakow first prize Best Marketing Campaign second prize Best Environmental Practice

Aqua Awards 2016, Paris

second prize Best Product Innovation Best Environmental Practice Green Initiative third prize Best Promotion of Healt and Hydration

Aqua Awards 2015, Rome

first prize Best Promotion of Health and Hydration Best Environmental Practice Green Initiative second prize Best Marketing Campaign Best Product Innovation Best Website

Aqua Awards 2010, Prague first prize

Best Environmentally Friendly Practice third prize Best Product Design Innovation

Aqua Awards 2014, Budapest first prize

Best Promotion of Health and Hydration

Aqua Awards 2013, Berlin first prize

Best Product Innovation third prize Best Environmental Practice / Green Initiative

Aqua Awards 2012, Istanbul first prize

Best Environmentally Friendly Practice third prize **Best Promotion** of Health and Hydration

Aqua Awards 2011, Odessa

first prize Best Product Design/ Innovation second prize Best Environmentally Friendly Practice **Best Website**



Certifications



Electrical compliance for the U.S. and Canadian markets

NSE

in food-preparation environments with a particular focus on water

Segurança



Safety certification for devices intended for use with drinking water in the United Kingdom



American safety certification of products French certification that ensures the safety of materials that enter into contact with water for human consumption



safety and health requirements



WaterMark



Certification for Australia and New Zealand confirming the safety of the materials that come



confirming the safety of the materials that come compliance with the regulations set out in Italian into contact with water for human consumption Ministerial Decrees 174/2004 and DM 25/2012





Brazilian certification for consumer electronics and home appliances



German certification of electrical compliance recognized throughout Europe

Compliance of the environmental management standards

Certificate of compliance with American certification of purity System suitable for the the European environmental, and quality of the dispensed water processing of food products

Water Quality



blupura



4

100% designed and manufactured in Italy. No compromise on materials or construction quality. First-class functionality and performance.

We really like to put our coolers to the test...

Indeed, we demand that they are the best they can possibly be, at all times, with a view to offering our customers the right cooler for every usage requirement. It is a choice that we pursue every day through a project geared towards total quality, which envisages the use of nothing but materials of the highest quality, to guarantee excellent durability and performance levels. But we also want our coolers to be beautiful, functional and ergonomic, benefitting from stylish, modern and proudly Italian design.

It is an ambitious philosophy, which requires a multi-faceted organisational approach, but one that enables us to verify the quality of the work being done, thanks to a design and manufacturing process managed inhouse, meaning that our units are entirely made in Italy, from start to finish. It is a production cycle that allows us to be a reliable, versatile partner for our customers, so that we can develop exclusive, customised solutions to insert the right cooler into the right context, in order to meet any set of functional and aesthetic requirements.



Our advantages



Dispensing

Option for sparkling and slightly sparkling water, room-temperature water, cold water at 5-12°C and, on certain models, even hot water at 95°C to make it easy to prepare tea and infusions.



80 It/h

Capacity

Every BluPura unit can dispense different quantities of cold water every hour.



Materials

Stainless-steel and aluminium, but that's not all – all of the materials used are made in Italy and are of the highest quality.

DRY

Cooling

Blupura coolers feature

cooling technologies:

the high-performance

Refrigerant gases

Use of fluoride-free

natural gases.

ICE BANK and the compact

BLUPURA DIRECT CHILL.

the innovative

DRY COOLING,

the following professional









portion

IoT

Controls Controls with high-quality stainless-steel buttons or TOUCH SCREEN controls allow for the easy use of the PORTION CONTROL function and for effective ENERGY SAVING. Shortly, the first coolers with "IoT" (Internet of Things) technology will be available, enabling remote management via an App.

carbon filter



a number of filtering solutions, including active-carbon filters, water treatment based on the principle of osmosis, and an in-line UVC (12 W) lamp.

Filtration

Our units feature



in

Anti-bacterial protection system.



In addition to the unique BLUPROTECTION treatment immediately applied after production, each Blupura water dispenser can be fitted with additional anti-bacterial protection systems such as UV-OUT lamps or NANO SILVER PIPE technology.

Cooling technology

DRY COOLING

This is an innovative, direct cooling technology that sees the water coils (made of stainless steel) and the refrigerant gas coils (made of copper) combined in a single diecast aluminium unit.

Using Dry Cooling allows the cooler to be more compact and to deliver professional levels of performance in a home or office context.



ICE BANK


This is the most high-end professional cooling technology, which is necessary in all those hospitality industry situations in which the highest levels of performance are essential.

These levels are reliably achieved thanks to the immersion of the water coils and the refrigerant gas coils into an ice bank.

BLUPURA DIRECT CHILL

Hygienic, direct-cooling technology with large-capacity carbonator.






Hygiene, Security and Filtration



BLUPROTECTION - At the end of the production process, the water circuits of each Blupura water cooler are filled with the BLUPROTECTION mixture in order to remove any Pseudomonas and avoid any proliferation.



UV OUT - Anti-bacterial UV lamp operating at the outlet on each tap. As demonstrated by numerous studies, UV rays have a sterilising effect and prevent bacterial proliferation.






CERTIFICATE



NANO SILVER PIPE - A pipe made from AISI 316L stainless-steel, which undergoes a special, innovative, nanotechnological surface treatment based on silver ions. Surfaces treated with these nano-particles take on a more compact, smoother form. This avoids the formation of deposits, biofilms and bacterial colonies. Moreover, since the water is flowing better in the tube, the number of drips at the end of the dispensing process is reduced.



IN-LINE UV Filtration using a UVC (12W) in-line lamp.





ACTIVE CARBON – Purifies the water, making it crystal clear, odourless and flavourless. Active carbon filters are able to capture all of the impurities up to 0.5 microns thick, eliminating all of the odours and flavours, such as those of dissolved chlorine, as well as any asbestos fibres and micro-organisms such as cryptosporidium.

Prices and technical specifications: page 81

pressure

applied

impurities



OSMOSIS

This is a water-treatment system based on the principle of reverse osmosis, carried out in order to lower the content of nitrates and other substances dissolved in the water, which - having undergone osmosis - has a very low fixed residue.

pure

water

semi-permeable

membrane

direction of water flow

Technology at the service of the user

touch

screer



I.T. INOX TOUCH



A control panel with high-quality stainless-steel buttons is our alternative to the touch-screen controls. It is a more comfortable solution that delivers the same level of performance.




TOUCH SCREEN FOR MAXIMUM HYGIENE!

A flat, elegant control panel: great design and unrivalled practicality for easy cleaning and maximum hygiene. The touch screen controls are all under glass and the absence of mechanical buttons allows for simple cleaning with the wipe of a sponge!





ENERGY SAVING







PORTION CONTROL

Volumetric portioning, which enables the customisation of the amounts dispensed, makes for a convenient, rapid service.




CONVEYOR

Water coolers generate heat when operating. The Blupura conveyor, as found on the BluSoda Box 30 and 45 models, collects and expels warm air through a single opening, in line with which a hole is made in the internal base of the cabinet that houses the Box, enabling optimum heat dissipation and saving a considerable amount of space.


> The conveyor is a device that can be used in the





ELECTRICAL PLUG

We have offices and distributors throughout the world to serve our customer base. It comes as no surprise, then, that every unit we produce can be made to comply with the electrical standards and plug types in use in any given territory.

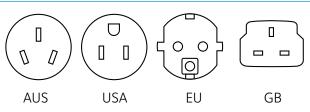

Intended use and ideas for use

| | D | | | 1 |
|-------------------------|-----------------------------|--------|---------|---------------------------------|
| PICCOLA | DOMESTIC | OFFICE | VENDING | HOSPITALITY |
| | ٥ | ٥ | ٥ | |
| | ٥ | ٥ | ٥ | |
| ECOCHIC | | ٥ | ٥ | 3 |
| BLUBAR | | ٥ | ٥ | . |
| BLUGLASS | ٥ | ٥ | 0 | 0 |
| | - | ٥ | 0 | |
| FONTEMAGNA | | 3 | 3 | 0 |
| PANTAREI | | ٥ | 3 | |
| | | | | |
| | | 0 | 0 | |
| BOX AND | 3 | 0 | 0 | 0 |
| 0-5 15 Lt/h . | 6-15 16-3 30 Lt/h. 45 Lt | | | -200 201-300 Lt/h. 280 Lt/h. |

COUNTERTOP



FLOORSTANDING



blupura

COUNTERTOP



FONTEMAGNA - p. 44

DISPENSING HEADS



blupura

DISPENSING HEADS







Modern design, unrivaled compactness, illuminated dispensing zone, limitless convenience. This is "Piccola", the small-but-mighty Blupura solution for every home and office.

Attractive and incredibly compact in its dimensions, Piccola stands out for its versatility, in both aesthetic and functional terms. Available in white or black versions, to allow it to fit seamlessly into any surrounding, Piccola offers a full four dispensing options: still, slightly sparkling, sparkling cold water and room temperature water. The Piccola Hot model dispenses hot water at 85°C, perfect for making teas and infusions. Piccola Hot features LED dispensing buttons with an alarm in the event of the absence of water, overflow or boiler malfunction. Piccola is equipped with Blupura Direct Chill, an exclusive hygienic, direct-cooling technology with large-capacity carbonator.

> Piccola Cabinet

Piccola **Hot**




Piccola White

| I | | Lt./h | Price € | fizz ambient | | Dimensions W x D x H (mm | Weight) (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|------------------------------|-----|-------|------------|--------------|-----|-----------------------------|------------------|-------------------------------|--|
| PICCOLA 15 | NSF | 15 | 910,00 | • | • | 240 x 451 x 42 | 5 19,5 | 281 | 18 |
| PICCOLA 15 Fizz | NSF | 15 | 1.375,00 | • • | • • | 240 x 451 x 42 | 5 19,5 | 281 | 18 |
| PICCOLA HOT 15 | NSF | 15 | 1.175,00 | • | ٠ | • 240 x 451 x 42 | 5 19,5 | 281 | 18 |
| PICCOLA HOT 15 Fizz | NSF | 15 | 1.670,00 | • • | ٠ | • 240 x 451 x 42 | 5 19,5 | 281 | 18 |
| PICCOLA WHITE 15 | | 15 | 910,00 | • | ٠ | 240 x 451 x 42 | 5 19,5 | 281 | 18 |
| PICCOLA WHITE 15 Fizz | | 15 | 1.375,00 | • • | • • | 240 x 451 x 42 | 5 19,5 | 281 | 18 |
| PICCOLA WHITE HOT 15 | | 15 | 1.175,00 | • | ٠ | • 240 x 451 x 42 | 5 19,5 | 281 | 18 |
| PICCOLA WHITE HOT 15 Fizz | | 15 | 1.670,00 | • • | ٠ | • 240 x 451 x 42 | 5 19,5 | 281 | 18 |

¹ Information not valid for shipments by air

| Optional Extras | | Price € | Accessories | Price € | |
|-----------------|---|------------|---|------------|--|
| In-line filters | Filter + Head | 160,00 | Incremental digital litre-counter 6000R | 42,00 | |
| In-line | UV In | 220,00 | | | |
| Outlet filters | UV Out | 150,00 | Decremental digital litre-counter 8000T | 42,00 | |
| Outlet | or nano silver pipe Nano Silver Pipe | 24,00 | | | |
| Reducers | Water pressure reducer | 46,00 | Piccola Cabinet | 240,00 | |
| Redu | CO2 pressure reducer with 1 pressure gauge | 60,00 | | | |
| Other | Bluprotection | 30,00 | TANK () 5 Lt. tank with re-fill alarm | 160,00 | |

| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) |
|-----------------|------------------------------|----------------------------|
| Piccola | 240 x 451 x 425 | 281 |
| Piccola White | 240 x 451 x 425 | 281 |
| Piccola Cabinet | 450 x 450 x 811 | - |

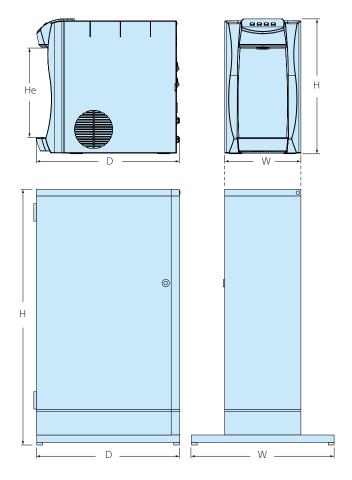

| Technical profile | PICCOLA 15 Fizz | PICCOLA Hot 15 Fizz | PICCOLA WHITE 15 Fizz | PICCOLA WHITE Hot 15 Fizz |
|--|--------------------------|-----------------------------|--------------------------|------------------------------|
| Cooling capacity | 15 (Lt/h.) | 15 - <mark>8</mark> (Lt/h.) | 15 (Lt/h.) | 15 - <mark>8</mark> (Lt/h.) |
| Temperature of cold water* | 5° - 12° C | 5° - 12° C | 5° - 12° C | 5° - 12° C |
| Cooling technology | BDC | BDC | BDC | BDC |
| Cold water coil | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 |
| Max. hot water temperature | - | 85°C | _ | 85°C |
| Hot water tank AISI 304 1000W Cooling | - | 1 Lt. | - | 1 Lt. |
| Cooling | Forced ventilation | Forced ventilation | Forced ventilation | Forced ventilation |
| Adjustable thermostat | Yes | Yes | Yes | Yes |
| Refrigerant gas | HC R600a | HC R600a | HC R600a | HC R600a |
| Professional carbonation pump | Membrane | Membrane | Membrane | Membrane |
| Power supply | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz |
| Power consumption | 190W - 1,05A | 810W - 3,10A | 190W - 1,05A | 810W - 3,10A |
| Ambient cooling temperature | Min 5°C - Max 35°C | Min 5°C - Max 35°C | Min 5°C - Max 35°C | Min 5°C - Max 35°C |
| Materials | ABS Plastic | ABS Plastic | ABS Plastic | ABS Plastic |

*estimated at an ambient temperature of 25 $^\circ\text{C}$ and an incoming water temperature of 20 $^\circ\text{C}$







DRY GAS R290 stainless STEEL 30 It/h 45 t/h **I.T.**)



Perfect for home and office, Blusoda is attractive and compact, and delivers professional-level performance. All the water you want, how you want it, always within reach.

With its functional design and stainless-steel construction, Blusoda delivers great performance in a small space. It can dispense cold still water, cold sparkling water and roomtemperature water, as well as hot water at 95°C (Hot version) for the preparation of teas and infusions. A safety device prevents the accidental dispensing of hot water. The range is complemented by the BluSoda PLUS 30 and 45 models, with LED buttons that function as safety alarms to indicate that the sparkling water has run out. Moreover, thanks to the mixer, they can also dispense slightly sparkling cold water.

Fitting seamlessly into any surroundings, Blusoda is available in stainless steel/ black and in a "total black" version. There are also two different cabinet designs, offering both style and functionality for the 30- and 45-liter models. Fitted with internal brackets for the attachment of filters and CO₂ cylinders, in addition to an outlet for the drip tray.

> BluSoda **Cabinet** with optional extra: 5-liter jug with re-fill alarm.

BluSoda

BluSoda Hot



BluSoda **Plus**



| | | Lt./h | Price € | fizz | ambient | medium | cold | hot control Price € | Dimensions W x D x H (mm) | Weight (kg) | Dispensin area He (mm) | ELIRO |
|----------------------|-----|-------|-------------|------|---------|--------|------|------------------------------|------------------------------|----------------|------------------------------|-------|
| BluSoda 30 | | 30 | 1.180,00 | | • | | • | | 261 x 499 x 418 | 26 | 281 | 12 |
| BluSoda 30 Fizz | NSE | 30 | 1.785,00 | ٠ | • | | • | 240,00 | 261 x 499 x 418 | 28 | 281 | 12 |
| BluSoda Plus 30 Fizz | | 30 | 1.845,00 | ٠ | • | | ٠ | 240,00 | 261 x 499 x 418 | 28 | 281 | 12 |
| Plusada Miy 20 Eizz | | 20 | 1 0 2 5 0 0 | | | | | | 261 x 400 x 419 | 20 | 201 | 10 |

| BluSoda Mix 30 Fizz | 30 | 1.925,00 | • | | • | • | | | 261 x 499 x 418 | 28 | 281 | 12 |
|----------------------------------|----|----------|---|---|---|---|---|--------|-----------------|----|-----|----|
| BluSoda <mark>Hot</mark> 30 | 30 | 1.545,00 | | • | | • | • | | 261 x 499 x 418 | 27 | 281 | 12 |
| BluSoda Hot 30 Fizz | 30 | 2.140,00 | ٠ | | | • | • | | 261 x 499 x 418 | 31 | 281 | 12 |
| BluSoda Black 30 | 30 | 1.320,00 | | • | | ٠ | | | 261 x 499 x 418 | 26 | 281 | 12 |
| BluSoda Black 30 Fizz | 30 | 1.930,00 | • | • | | • | | 240,00 | 261 x 499 x 418 | 28 | 281 | 12 |
| BluSoda Black Hot 30 | 30 | 1.685,00 | | • | | • | • | | 261 x 499 x 418 | 27 | 281 | 12 |
| BluSoda Black Hot 30 Fizz | 30 | 2.285,00 | ٠ | | | • | • | | 261 x 499 x 418 | 31 | 281 | 12 |
| BluSoda 45 | 45 | 1.525,00 | | • | | • | | | 318 x 499 x 470 | 29 | 331 | 12 |
| BluSoda 45 Fizz | 45 | 2.130,00 | ٠ | • | | ٠ | | 240,00 | 318 x 499 x 470 | 31 | 331 | 12 |
| BluSoda Plus 45 Fizz | 45 | 2.215,00 | ٠ | • | | • | | 240,00 | 318 x 499 x 470 | 34 | 331 | 12 |
| BluSoda Mix 45 Fizz | 45 | 2.270,00 | • | | ٠ | • | | | 318 x 499 x 470 | 34 | 331 | 12 |
| BluSoda <mark>Hot</mark> 45 | 45 | 1.880,00 | | ٠ | | • | • | | 318 x 499 x 470 | 33 | 331 | 12 |
| BluSoda <mark>Hot</mark> 45 Fizz | 45 | 2.485,00 | ٠ | | | • | • | | 318 x 499 x 470 | 35 | 331 | 12 |
| BluSoda Black 45 | 45 | 1.670,00 | | • | | • | | | 318 x 499 x 470 | 29 | 331 | 12 |
| BluSoda Black 45 Fizz | 45 | 2.275,00 | • | • | | • | | 240,00 | 318 x 499 x 470 | 31 | 331 | 12 |
| BluSoda Black Hot 45 | 45 | 2.025,00 | | • | | • | • | | 318 x 499 x 470 | 33 | 331 | 12 |
| BluSoda Black Hot 45 Fizz | 45 | 2.630,00 | ٠ | | | • | ٠ | | 318 x 499 x 470 | 35 | 331 | 12 |
| | | | | | | | | | | | | |

¹ Information not valid for shipments by air

| 0 | ptional | Extras | Price € | Accesso | pries | Price € |
|-----------------|--------------|--|------------|---------|--|------------|
| filters | <u>¥</u> | Filter + Head | 160,00 | | Cup Rest | 158,00 |
| In-line filters | | UV In | 220,00 | | Incremental digital litre-counter 6000R | 42,00 |
| ters | | UV Out | 150,00 | | Decremental digital litre-counter 8000T | 42,00 |
| Outlet filters | or | Nano Silver Pipe | 24,00 | | BluSoda Cabinet 30 | 358,00 |
| 0 | silver | | 24,00 | Í, | BluSoda Black Cabinet 30 | 470,00 |
| Reducers | | Water pressure reducer | 46,00 | | BluSoda Cabinet 45 | 390,00 |
| Rec | | CO_2 pressure reducer with 1 pressure gauge (only for Fizz models) | 60,00 | Ĩ, | BluSoda Black Cabinet 45 | 490,00 |
| Other | BUPROTECTION | Bluprotection | 30,00 | TANK (| 5 Lt. tank with re-fill alarm) (can be combined with Blusoda Cabinet 30 and Blusoda Cabinet 45) | 160,00 |

Bl Bl Bl

| Dimensions | | ensing area He (mm) | | | |
|-------------------------------|---|-------------------------|-------------------------|---|---|
| BluSoda 30 | 261 x 499 x 418 | 281 | H | н | le |
| BluSoda Black 30 | 261 x 499 x 418 | 281 | | | |
| BluSoda 45 | 318 x 499 x 470 | 331 | | ° | |
| BluSoda Black 45 | 318 x 499 x 470 | 331 | | | |
| BluSoda Cabinet 30 | 496 x 495 x 1011 | - | H | | |
| BluSoda Black Cabinet 30 | 496 x 495 x 1011 | - | | | |
| BluSoda Cabinet 45 | 554 x 491 x 959 | - | | 030 | |
| BluSoda Black Cabinet 45 | 554 x 491 x 959 | - | | | D |
| Technical profile | BluSoda 30 Fizz BluSoda Black 30 Fizz BluSoda Mix 30 Fizz BluSoda Plus 30 Fizz | BluSoda Bl BluSoda N | Aix 45 Fizz | For the BluSoda Hot 30 Fizz BluSoda Black Hot 30 Fizz | e Standard Cabinet, see page 33 BluSoda Hot 45 Fizz BluSoda Black Hot 45 Fizz |
| Cooling capacity | 30 (Lt/h.) | 45 (| Lt/h.) | 30 - <mark>8</mark> (Lt/h.) | 45 - <mark>8</mark> (Lt/h.) |
| Temperature of cold water* | 5° - 12° C | 5°- | 12° C | 5° - 12° C | 5° - 12° C |
| Cooling technology | Die-cast aluminium | Die-cast | aluminium | Die-cast aluminium | Die-cast aluminium |
| Cold water coil | Stainless steel AISI 316 | Stainless st | eel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 |
| Max. hot water temperature | - | | _ | 95°C | 95°C |
| Boiler capacity | - | | _ | 1 Lt. | 1 Lt. |
| Cooling | Forced ventilation | Forced v | entilation | Forced ventilation | Forced ventilation |
| Adjustable thermostat | Yes | Y | és | Yes | Yes |
| Refrigerant gas | HC R290 | HC I | R290 | HC R290 | HC R290 |
| Professional carbonation pump | Membrane | Mem | brane | Membrane | Membrane |
| Power supply | 230 V - 50 Hz | 230 V | - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz |
| Power consumption | 230W - 1A | 300W | - 1.3 A | 1220W - 5.3 A | 1290W - 5.6 A |
| Ambient cooling temperature | Min 5°C - Max 35°C | Min 5°C - | Max 35°C | Min 5°C - Max 35°C | Min 5°C - Max 35°C |
| Materials | Parts made of robust stainless steel | | e of robust ss steel | Parts made of robust stainless steel | Parts made of robust stainless steel |

*estimated at an ambient temperature of 25 $^{\circ}\text{C}$ and an incoming water temperature of 20 $^{\circ}\text{C}$





The designer, compact cooler for offices and community centres. The quality choice for those who want a stylish, versatile, powerful cooler.

All Wave models deliver cold still water, cold sparkling water and roomtemperature water, along with hot water at 95 °C for the preparation of teas and infusions (Hot version). The quality of Wave is also evident in its safety specifications and its optional extras. The Wave IT version has identical performance levels to WAVE but in a more practical version, thanks to touch-screen commands with high-quality stainlesssteel buttons. Wave has a 27cm-tall dispensing area, but also available on request is the Wave Tall version with a 31cm-tall dispensing area.

Wave Curved Cabinet

Complementing the Wave range are two cabinets: the Curved Cabinet for 60-liter/hour modes, made entirely from stainless steel, with lines that match the cooler's unmistakable design, and the Standard Cabinet, which can be combined with all Wave models (see page 33).

Wave





Wave I.T.







| | Lt./h | Price € | fizz ambient Cold | | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|---------------------------|-------|------------|-------------------|--------|------------------------------|----------------|-------------------------------|--|
| Wave I.T. 30 | 30 | 1.240,00 | • • | 240,00 | 272 x 453 x 467 | 21 | 270 | 10 |
| Wave I.T. 30 Fizz | 30 | 1.785,00 | • • • | 240,00 | 272 x 453 x 467 | 24 | 270 | 10 |
| Wave I.T. 60 | 60 | 1.545,00 | • • | 240,00 | 330 x 489 x 467 | 26 | 270 | 12 |
| Wave I.T. 60 Fizz | 60 | 2.130,00 | • • • | 240,00 | 330 x 489 x 467 | 30 | 270 | 12 |
| Wave 30 | 30 | 1.340,00 | • • | 240,00 | 272 x 453 x 467 | 20 | 270 | 10 |
| Wave 30 Fizz | 30 | 1.870,00 | • • • | 240,00 | 272 x 453 x 467 | 23 | 270 | 10 |
| Wave 60 | 60 | 1.640,00 | • • | 240,00 | 330 x 489 x 467 | 25 | 270 | 12 |
| Wave 60 Fizz | 60 | 2.270,00 | • • • | 240,00 | 330 x 489 x 467 | 28 | 270 | 12 |
| Wave Hot I.T. 60 | 60 | 2.055,00 | • • • | 240,00 | 330 x 489 x 467 | 30 | 270 | 12 |
| Wave Hot I.T. 60 Fizz NSE | 60 | 2.645,00 | • • • | 240,00 | 330 x 489 x 467 | 33 | 270 | 12 |


¹ Information not valid for shipments by air


| 0 | ptional Extras | Price € | Accesso | ries | Price € |
|-----------------|---|------------|-----------|--|------------|
| In-line filters | Filter + Head | 160,00 | | Standard cabinet without cup dispenser | 370,00 |
| In-lin | UV In | 220,00 | | Standard cabinet with cup dispenser | 400,00 |
| Outlet filters | or UV Out | 150,00 | TANK () | 5 Lt. tank with re-fill alarm (for use with standard cabinet) | 160,00 |
| Outle | Nano Silver Pipe | 24,00 | \square | Cabinet Wave Curved | |
| ers | Water pressure reducer | 46,00 | | (only for 60 Lt/h. version) | 420,00 |
| Reducers | CO ₂ pressure reducer with 1 pressure gauge (only for Fizz models) | 60,00 | | Incremental digital litre-counter 6000R | 42,00 |
| er | Bluprotection | 30,00 | | Decremental digital litre-counter 8000T | 42,00 |
| Other | Tall Tall Version (to be specified when placing your order) | - | | Wave tray outlet | 23,00 |

| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) |
|---------------------|------------------------------|----------------------------|
| Wave 30 | 272 x 453 x 467 | 270 |
| Wave 60 | 272 x 453 x 467 | 270 |
| Wave 30 Tall | 272 x 453 x 467 | 310 |
| Wave 60 Tall | 330 x 489 x 467 | 310 |
| Wave Curved Cabinet | 510 x 606 x 904 | - |





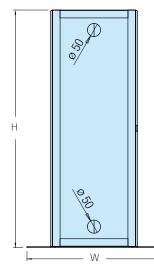

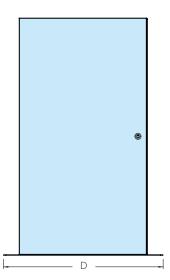

For the Standard Cabinet, see page 33

| Technical profile | Wave 30 Fizz Wave I.T. 30 Fizz | Wave 60 Fizz Wave I.T. 60 Fizz | Wave Hot I.T. 60 Fizz | | |
|-------------------------------|--|--|--|--|--|
| Cooling capacity | 30 (Lt/h.) | 60 (Lt/h.) | 60 - <mark>8</mark> (Lt/h.) | | |
| Temperature of cold water* | 5° - 12° C | 5° - 12° C | 5° - 12° C | | |
| Ice Bank capacity (Lt) | 4 | 7 | 7 | | |
| Ice Bank (Kg) | 1,5 | 3 | 3 | | |
| Cooling technology | Ice Bank – Single Stainless Steel coil | Ice Bank – Single Stainless Steel coil | Ice Bank - Single Stainless Steel coil | | |
| Cold water coil | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 | | |
| Max. hot water temperature - | | - | 95°C | | |
| Boiler capacity | - | - | 1 Lt. | | |
| Cooling | Forced ventilation | Forced ventilation | Forced ventilation | | |
| Adjustable thermostat | Yes | Yes | Yes | | |
| Refrigerant gas | HFC R134a | HC R290 | HC R290 | | |
| Professional carbonation pump | Membrane | | Membrane | | |
| Power supply | | | 230 V - 50 Hz | | |
| Power consumption | 230W - 1A | 310W - 1,35A | 1220W - 5,3A | | |
| Ambient cooling temperature | Ambient cooling temperature Min 5°C - Max 35°C | | Min 5°C - Max 35°C | | |
| Materials | Parts made of robust stainless steel | Parts made of robust stainless steel | Parts made of robust stainless steel | | |

*estimated at an ambient temperature of 25 $^{\circ}\text{C}$ and an incoming water temperature of 20 $^{\circ}\text{C}$

ecúchic









The counter-top solution for hospitality-industry professionals – combining a captivating, elegant design with exceptional performance.

All of the Ecochic models dispense cold still water and cold sparkling water, as well as room-temperature water.

Ecochic is a stylish, characterful countertop cooler, featuring an attractive design that makes the most of the construction quality of the stainless-steel shell with an eye-catching blue Plexiglas insert. The technical specification is very much top-of-therange: high-performance ice bank; comprehensive safety features; excellent ergonomics (both for the user and the service personnel); no compromise on materials and technical specifications.

Ecochic I.T.

has practical and robust stainless-steel dispensing buttons, whereas **Ecochic "beer" tap** has manual mechanical faucets. **Cabinet Standard** made entirely of stainless steel for the 80-liter/hour model only.

Cabinet Standard

Ecochic **I.T.**

Ecochic **"beer" tap**




| | | Lt./h | Price € | (fizz) ambient (cold | Price € | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|--------------------------------|-------------------|-------|------------|----------------------|------------|------------------------------|----------------|-------------------------------|--|
| Ecochic I.T. 80 | W | 80 | 2.560,00 | • • | 240,00 | 345 x 592 x 555 | 29 | 238 - 277 315 - 372 | 8 |
| Ecochic I.T. 80 Fizz | Witten | 80 | 3.155,00 | • • • | 240,00 | 345 x 592 x 555 | 36 | 238 - 277 315 - 372 | 8 |
| Ecochic I.T. 150 | Water | 150 | 2.815,00 | • • | 240,00 | 488 x 589 x 555 | 46 | 237 - 275 314 - 370 | 4 |
| Ecochic I.T. 150 Fizz | V ariation | 150 | 3.505,00 | • • • | 240,00 | 488 x 589 x 555 | 49 | 237 - 275 314 - 370 | 4 |
| Ecochic "beer" tap 80 | | 80 | 2.445,00 | • • | | 345 x 592 x 580 | 32 | 203 - 242 280 - 332 | 8 |
| Ecochic "beer" tap 80 Fizz | Vacentiat | 80 | 2.955,00 | • • • | | 345 x 592 x 580 | 35 | 203 - 242 280 - 332 | 8 |
| Ecochic "beer" tap 150 | WaterWate | 150 | 2.725,00 | • • | | 488 x 589 x 580 | 43 | 202 - 240 279 - 336 | 4 |
| Ecochic "beer" tap 150 Fizz | Kaserilat | 150 | 3.415,00 | • • • | | 488 x 589 x 580 | 46 | 202 - 240 279 - 336 | 4 |

¹ Information not valid for shipments by air

| 0 | ptional Extras | Price € | Accesso | ries | Price € |
|-----------------|--|---|---------|--|------------|
| In-line filters | Filter + Head | 160,00 | | Standard cabinet without cup dispenser | 370,00 |
| In-line | UV In | 220,00 Standard cabinet with cup dispenser | | Standard cabinet with cup dispenser | 400,00 |
| Outlet filters | UV Out (only for I.T. models) | 360,00 | TANK () | 5 Lt. tank with re-fill alarm (for use with standard cabinet) | 160,00 |
| Outle | Nano Silver Pipe (only for I.T. models) | 72,00 | | Incremental digital litre-counter 6000R | 42,00 |
| cers | Water pressure reducer | 46,00 | | | 42,00 |
| Reducers | CO ₂ pressure reducer with 2 pressure gauge (only for Fizz models) | 98,00 | | Decremental digital litre-counter 8000T | 42,00 |
| er | Bluprotection | 30,00 | | Mechanical litre-counter | 50,00 |
| Other | Water Block (to ensure correct installation, the water block is essential on the "beer tap" version) | 38,00 | | Tray with outlet | 14,00 |

| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) | |
|------------------------|------------------------------|----------------------------|------------------|
| Ecochic I.T. 80 | 345 x 592 x 555 | 238 - 277 - 315 - 372 | |
| Ecochic I.T. 150 | 488 x 589 x 555 | 237 - 275 - 314 - 370 | |
| Ecochic "beer" tap 80 | 345 x 592 x 580 | 203 - 242 - 280 - 332 | |
| Ecochic "beer" tap 150 | 488 x 589 x 580 | 202 - 240 - 279 - 336 | |
| Cabinet Standard | 318 x 485 x 944 | - | - <u>1</u> 22 |

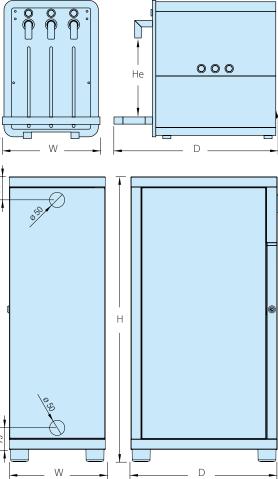

| Technical profile | Ecochic I.T. 80 Fizz | Ecochic I.T. 150 Fizz | Ecochic "beer" Tap 80 Fizz | Ecochic "beer" Tap 150 Fizz | |
|----------------------------------|--|--|--|--|--|
| Cooling capacity | 80 (Lt/h.) | 150 (Lt/h.) | 80 (Lt/h.) | 150 (Lt/h.) | |
| Temperature of cold water* | emperature of cold water* 5° – 12° C | | 5° - 12° C | 5° - 12° C | |
| Ice Bank capacity (Lt) | 14 | 18 | 14 | 18 | |
| Ice Bank (Kg) | 5 | 8 | 5 | 8 | |
| Cooling technology | Ice Bank – Single Stainless Steel coil | |
| Cold water coil | Stainless steel AISI 316 | |
| Cooling | Cooling Forced ventilation | | Forced ventilation | Forced ventilation | |
| Adjustable thermostat Yes | | Yes | Yes | Yes | |
| Refrigerant gas | rigerant gas HC R290 | | HC R290 | HC R290 | |
| Professional carbonation pump | Botary | | Rotary | Rotary | |
| Power supply | 230 V - 50 Hz | |
| Power consumption | 530W - 2.3A | 920W - 4A | 505W - 2.2A | 875W - 3.8A | |
| Ambient cooling temperature | Min 5°C - Max 35°C | |
| Materials | Parts made of robust stainless steel Plexiglas cover panel | |

*estimated at an ambient temperature of 25 $^{\circ}\text{C}$ and an incoming water temperature of 20 $^{\circ}\text{C}$







Available in counter-top and floor-standing versions, BluBar is the Blupura cooler that has been designed to offer unrivalled levels of performance.

BluBar offers the best user experience for bar staff and restaurateurs who want to interact with a robust, elegant, functional unit that delivers a highly professional service.

It is synonymous with simplicity,

functionality, reliability and economy, making it perfect for hospitality-industry professionals. All BluBar models deliver cold still water and cold sparkling water.

BLUBAR I.T.






| | Lt./h | Price € | |) (portion) control Price € | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|----------------------------------|-------|------------|-------|--------------------------------------|------------------------------|----------------|-------------------------------|--|
| BLUBAR "beer" tap 30 | 30 | 1.355,00 | • • | | 318 x 576 x 537 | 24 | 328 | 8 |
| BLUBAR "beer" tap 30 Fizz | 30 | 1.955,00 | • • | | 318 x 576 x 537 | 26 | 328 | 8 |
| BLUBAR "beer" tap 80 | 80 | 2.155,00 | • • | | 360 x 565 x 566 | 33 | 320 | 8 |
| BLUBAR "beer" tap 80 Fizz NSF. 💟 | 80 | 2.645,00 | • • | | 360 x 565 x 566 | 35 | 320 | 8 |
| BLUBAR "beer" tap 150 | 150 | 2.635,00 | • • | | 460 x 626 x 616 | 43 | 329 | 4 |
| BLUBAR "beer" tap 150 Fizz | 150 | 3.285,00 | • • | | 460 x 626 x 616 | 46 | 329 | 4 |
| BLUBAR I.T. 80 | 80 | 2.370,00 | • • | 240,00 | 360 x 565 x 502 | 30 | 328 | 8 |
| BLUBAR I.T. 80 Fizz | 80 | 2.955,00 | • • | 240,00 | 360 x 565 x 502 | 33 | 328 | 8 |
| BLUBAR I.T. 80 Fizz 3W | 80 | 3.035,00 | • • • | 240,00 | 360 x 565 x 502 | 33 | 328 | 8 |
| BLUBAR I.T. 150 | 150 | 2.720,00 | • • | 240,00 | 460 x 626 x 541 | 41 | 337 | 4 |
| BLUBAR I.T. 150 Fizz NSE 🐪 | 150 | 3.390,00 | • • | 240,00 | 460 x 626 x 541 | 44 | 337 | 4 |
| BLUBAR FS "beer" tap 80 | 80 | 2.645,00 | • • | | 500 x 520 x 1489 | 48 | 350 | 2 |
| BLUBAR FS "beer" tap 80 Fizz | 80 | 3.345,00 | • • | | 500 x 520 x 1489 | 48 | 350 | 2 |
| BLUBAR FS "beer" tap 150 | 150 | 2.955,00 | • • | | 500 x 520 x 1489 | 49 | 350 | 2 |
| BLUBAR FS "beer" tap 150 Fizz | 150 | 3.560,00 | • • | | 500 x 520 x 1489 | 55 | 350 | 2 |

| 0 | ptional | Extras | Price € | Accessor | ries | Price € |
|-----------------|------------------------|--|------------|----------|--|------------|
| In-line filters | Ě | Filter + Head | 160,00 | | BLUBAR Cabinet 30 | 358,00 |
| ln-lin | UV | UV In | 220,00 | | BLUBAR Cabinet 80 | 390,00 |
| Outlet filters | or | UV Out (only for I.T. models) | 240,00 | TANK () | 5 Lt. tank with re-fill alarm (can be combined with Cabinet standard) | 160,00 |
| Out | nano silver pipe | Nano Silver Pipe (only for I.T. models) | 48,00 | | Incremental digital litre-counter 6000R | 42,00 |
| cers | | Water pressure reducer | 46,00 | | | |
| Reducers | | CO ₂ pressure reducer with 2 pressure gauge (only for Fizz models) | 98,00 | | Decremental digital litre-counter 8000T | 42,00 |
| er | EUPROTECTION | Bluprotection | 30,00 | | Mechanical litre-counter | 50,00 |
| Other | | Water Block (to ensure correct installation, the water block is essential on the "beer tap" version) | 38,00 | | Tray with outlet (only for the countertop version, supplied as standard for the 30 Lt/h. version and the floorstanding version) | 14,00 |

¹ Information not valid for shipments by air

| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) |
|-----------------------------|------------------------------|----------------------------|
| BLUBAR "beer" tap 30 | 318 x 576 x 537 | 328 |
| BLUBAR I.T. 80 | 360 x 565 x 502 | 328 |
| BLUBAR "beer" tap 80 | 360 x 565 x 566 | 320 |
| BLUBAR I.T. 150 | 460 x 626 x 541 | 337 |
| BLUBAR "beer" tap 150 | 460 x 626 x 616 | 329 |
| BLUBAR Floorstanding 80 | 500 x 520 x 1489 | 350 |
| BLUBAR Floorstanding 150 | 500 x 520 x 1489 | 350 |
| | | |
| BLUBAR Cabinet 30 | 318 x 485 x 944 | - |
| BLUBAR Cabinet 80 | 360 x 565 x 920 | - |

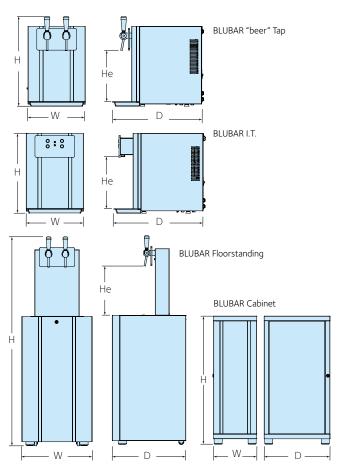

| Technical profile | BLUBAR "beer" tap 30 Fizz | BLUBAR "beer" tap 80 Fizz BLUBAR I.T. 80 Fizz | BLUBAR "beer" tap 150 Fizz BLUBAR I.T. 150 Fizz | BLUBAR FS "beer" tap 80 Fizz | BLUBAR FS "beer" tap 150 Fizz |
|-------------------------------|--|--|---|---|---|
| Cooling capacity | 30 (Lt/h.) | 80 (Lt/h.) | 150 (Lt/h.) | 80 (Lt/h.) | 150 (Lt/h.) |
| Temperature of cold water* | 5° - 12° C | 5° - 12° C | 5° - 12° C | 5° - 12° C | 5° - 12° C |
| Ice Bank capacity (Lt) | - | 14 | 18 | 14 | 18 |
| Ice Bank (Kg) | - | 5 | 8 | 5 | 8 |
| Cooling technology | Die-cast aluminium | Ice Bank – Single Stainless Steel coil | Ice Bank – Double Stainless Steel coil | Ice Bank – Single Stainless Steel coil | Ice Bank – Double Stainless Steel coil |
| Cold water coil | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 |
| Cooling | Forced ventilation | Forced ventilation | Forced ventilation | Forced ventilation | Forced ventilation |
| Adjustable thermostat | Yes | Yes | Yes | Yes | Yes |
| Refrigerant gas | HC R290 | HC R290 | HC R290 | HC R290 | HC R290 |
| Professional carbonation pump | Membrane | Rotary | Rotary | Rotary | Rotary |
| Power supply | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz |
| Power consumption | 230W - 1A | 530W - 2.3A | 920W - 4A (I.T.) 575W - 2.5A (B.T.) | 530W - 2.3A | 875W - 3.8A |
| Ambient cooling temperature | Min 5°C Max 35°C | Min 5°C Max 35°C | Min 5°C Max 35°C | Min 5°C Max 35°C | Min 5°C Max 35°C |
| Materials | Parts made of robust stainless steel Plexiglas cover panel | Parts made of robust stainless steel Plexiglas cover panel | stainless steel | stainless steel | stainless steel |

*estimated at an ambient temperature of 25 $^{\circ}\text{C}$ and an incoming water temperature of 20 $^{\circ}\text{C}$

bluglass





The perfect blend of elegance, functionality and excellent performance, complete with cutting-edge design and technology.

Bluglass is Blupura's range of exceptionally stylish countertop water coolers that, by embodying state-of-the-art technology and design, are the perfect choice for any environment. Every Bluglass model is made from sturdy stainless steel and tempered glass, and is equipped with a professional stainless-steel carbonator. Each model delivers professional-level performance and dispenses cold still water, roomtemperature water, sparkling water and hot water (in the Hot versions). The ergonomic design makes installation simple and rapid.

Compact, powerful and wonderfully stylish, **Bluglass 30** is the perfect model to allow you to supply plenty of high-quality water at home and in the office. **Bluglass I.T. 80** is the countertop solution: its modern, refined design is perfect for bars and restaurants, and Portion Control comes as standard. The internal parts, the cooling coils, the adjustable feet and the suspended tray are made entirely of stainless steel. For those who do not want to do without manual mechanical faucets, we have designed Bluglass "beer" tap 80, which enables the filling of multiple bottles at the same time.

Bluglass Plus is the top of the range model, and it encapsulates the very best in design allied to stateof-the-art technology. It is fully programmable through a 7" touchscreen interface, which can display a large number of parameters, allowing you to control the portion sizes, monitor the number of liters dispensed for each type of water, manage diagnostics and alarms, set daily schedules and program time slots for the energy-saving function...it even enables you to display informative and advertising video content in stand-by mode. In other words, it offers you everything you could need!

The best cooling technology With a **double coil** ice-bank, the Bluglass 80 offers a superior performance as expected from a top of the range chiller



| i i i i | Lt./h | Price € | | | | hot | Price € | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|--------------------------------|-------|------------|---|---|---|-----|------------|------------------------------|----------------|-------------------------------|--|
| Bluglass 30 | 30 | 1.613,00 | | • | • | | 240,00 | 299 x 493 x 435 | 28 | 276 | 12 |
| Bluglass 30 Fizz | 30 | 2.120,00 | • | • | ٠ | | 240,00 | 299 x 493 x 435 | 28 | 276 | 12 |
| Bluglass Hot 30 | 30 | 2.133,00 | | • | • | • | | 299 x 493 x 435 | 28 | 276 | 12 |
| Bluglass Hot 30 Fizz | 30 | 2.640,00 | • | • | • | • | | 299 x 493 x 435 | 28 | 276 | 12 |
| Bluglass I.T. 80 | 80 | 3.307,00 | | • | • | | • | 400 x 580 x 564 | 36 | 313 | 4 |
| Bluglass I.T. 80 Fizz | 80 | 3.800,00 | • | • | • | | • | 400 x 580 x 564 | 36 | 313 | 4 |
| Bluglass "beer" tap 80 | 80 | 2.907,00 | | • | • | | | 400 x 580 x 564 | 36 | 313 | 4 |
| Bluglass "beer" tap 80 Fizz | 80 | 3.387,00 | • | • | • | | | 400 x 580 x 564 | 36 | 313 | 4 |
| Bluglass Plus 80 | 80 | 4.627,00 | • | • | • | | • | 400 x 580 x 564 | 36 | 313 | 4 |

¹ Information not valid for shipments by air

| Optional Extras | | | Price € | Accessories | Price € |
|-----------------|--------------|--|------------|---|------------|
| In-line filters | | Filter + Head | 160,00 | | |
| In-line | UV | UV In | 220,00 | Incremental digital litre-counter 6000R | 42,00 |
| | | UV Out (Bluglass 30) | 150,00 | | |
| Outlet filters | out | UV Out (Bluglass IT, Bluglass Plus) | 360,00 | | |
| Outlet | nano | Nano Silver Pipe (Bluglass 30) | 24,00 | Decremental digital litre-counter 8000T | 42,00 |
| | pipe | Nano Silver Pipe (Bluglass IT, Bluglass Plus) | 72,00 | | 42,00 |
| cers | | Water pressure reducer | 46,00 | | |
| Reducers | | CO ₂ pressure reducer with 2 pressure gauge (only for Fizz models) | 98,00 | | |
| ler | BUPROTECTION | Bluprotection | 30,00 | Mechanical litre-counter | 50,00 |
| Other | | Water Block (to ensure correct installation, the water block is essential on the "beer tap" version) | 38,00 | | |


| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) |
|-----------------------------|------------------------------|----------------------------|
| Bluglass 30 | 299 x 493 x 435 | 276 |
| Bluglass 30 Fizz | 299 x 493 x 435 | 276 |
| Bluglass Hot 30 | 299 x 493 x 435 | 276 |
| Bluglass Hot 30 Fizz | 299 x 493 x 435 | 276 |
| Bluglass I.T. 80 | 400 x 580 x 564 | 313 |
| Bluglass I.T. 80 Fizz | 400 x 580 x 564 | 313 |
| Bluglass "beer" tap 80 | 400 x 580 x 564 | 313 |
| Bluglass "beer" tap 80 Fizz | 400 x 580 x 564 | 313 |
| Bluglass Plus 80 | 400 x 580 x 564 | 313 |

BLUGLASS 30 - BLUGLASS Hot 30

Н

Н


k

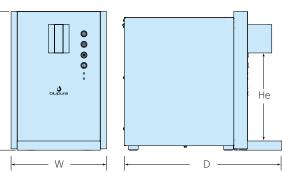

BLUGLASS I.T. 80 - BLUGLASS "beer" tap 80 - BLUGLASS Plus 80

 $\left[\right]$

– W –



| | He |
|--|-------|
| | ↓ |

| Technical profile | BLUGLASS 30 Fizz | BLUGLASS Hot 30 Fizz | BLUGLASS I.T. 80 Fizz | BLUGLASS "beer" tap 80 Fizz | BLUGLASS PLUS 80 |
|-------------------------------|---------------------------------------|------------------------------------|---|---|---|
| Cooling capacity | 30 (Lt/h.) | 30 - <mark>8</mark> (Lt/h.) | 80 (Lt/h.) | 80 (Lt/h.) | 80 (Lt/h.) |
| Temperature of cold water* | 5° - 12° C | 5° - 12° C | 5° - 12° C | 5° - 12° C | 5° - 12° C |
| Professional carbonation pump | membrane | membrane | rotary | rotary | rotary |
| Cooling technology | Die-cast aluminium | Die-cast aluminium | Ice Bank – Double Stainless Steel coil | Ice Bank – Double Stainless Steel coil | Ice Bank - Double Stainless Steel coil |
| Ice bank capacity (Lt.) | - | - | 15 | 15 | 15 |
| Ice bank (Kg.) | - | - | 5 | 5 | 5 |
| Cooling | Forced ventilation | Forced ventilation | Forced ventilation | Forced ventilation | Forced ventilation |
| Refrigerant gas | R290 | R290 | R290 | R290 | R290 |
| Max hot water temperature | - | 85° C | - | _ | - |
| Boiler capacity | - | 1 Lt. | - | _ | - |
| Adjustable thermostat | Yes | Yes | Yes | Yes | Yes |
| Power supply | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz |
| Compressor power | 1/8 HP | 1/8 HP | 1/5 HP | 1/5 HP | 1/5 HP |
| Power consumption | 230 W - 1 A | 720 W - 3,3 A | 400 W - 2 A | 300 W - 1,6 A | 400 W - 2 A |
| Ambient cooling temperature | Min 5°C Max 35°C | Min 5°C Max 35°C | Min 5°C Max 35°C | Min 5°C Max 35°C | Min 5°C Max 35°C |
| Materials | Stainless steel and tempered glass | Stainless steel and tempered glass | Stainless steel and tempered glass | Stainless steel and tempered glass | Stainless steel and tempered glass |

*estimated at an ambient temperature of 25 $^{\circ}\text{C}$ and an incoming water temperature of 20 $^{\circ}\text{C}$





Paired down and Simplistic in design but Powerful in performance, Cool 1 is the Blupura dispenser for high volume self-service areas!

Capable of supplying large quantities of still or sparkling water, Cool1 is a reliable, robust cooler geared very much towards maximum simplicity and practicality of use.

Dimensions

Cool1


- Dual-function buttons positioned below
- Comfortable front opening for maintenance and inspection
- Solenoid inlet valve
- Internal space to house a bracket for filters and the 6 kg CO₂ cylinder strap




| | Lt./h | Price € | fizz ambient Cold | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|----------------|-------|------------|-------------------|------------------------------|----------------|-------------------------------|--|
| COOL1 80 | 80 | 2.230,00 | • • | 479 x 428 x 1440 | 39 | 297 | 2 |
| COOL1 80 Fizz | 80 | 2.725,00 | • • • | 479 x 428 x 1440 | 42 | 297 | 2 |
| COOL1 150 | 150 | 2.385,00 | • • | 479 x 428 x 1440 | 46 | 297 | 2 |
| COOL1 150 Fizz | 150 | 3.030,00 | • • • | 479 x 428 x 1440 | 49 | 297 | 2 |

¹ Information not valid for shipments by air

| Technical profile | Cool1 80 Fizz | Cool1 150 Fizz | Ο |
|-------------------------------|---|---|----------------|
| Cooling capacity | 80 (Lt/h.) | 150 (Lt/h.) | |
| Temperature of cold water* | 5° - 12° C | 5° - 12° C | ers |
| Ice Bank capacity (Lt) | 14 | 18 | e filt |
| Ice Bank (Kg) | 5 | 8 | n-line filters |
| Cooling technology | Ice Bank Single Stainless Steel coil | Ice Bank Double Stainless Steel coil | <u>_</u> |
| Cold water coil | Stainless steel AISI 316 | Stainless steel AISI 316 | 6 |
| Cooling | Forced ventilation | Forced ventilation | Outlet filters |
| Adjustable thermostat | Yes | Yes | et fi |
| Refrigerant gas | HC R290 | HC R290 | outle |
| Professional carbonation pump | Membrane | Rotary | 0 |
| Power supply | 230 V - 50 Hz | 230 V - 50 Hz | - |
| Power consumption | 530 W - 2,3 A | 920 W - 4 A | 10 |
| Ambient cooling temperature | Min 5°C - Max 35°C | Min 5°C - Max 35°C | ceré |
| Materials | Parts made of robust stainless steel | Parts made of robust stainless steel | Seducers |
| | | | 2 |

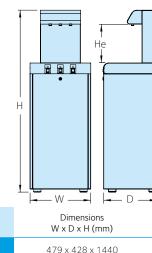

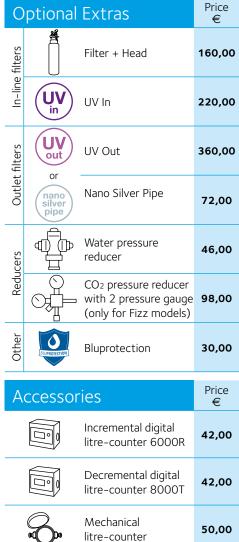

*estimated at an ambient temperature of $25\,^{\circ}\text{C}$ and an incoming water temperature of $20\,^{\circ}\text{C}$

Dispensing area

He (mm)

297

FONTEMAGNA

blupura

Made in Italy

GAS R290

80 It/h **150** ⊮⁄ʰ

ICE BANK

energy saving



stainless STEEL

aluminum

touch

I.T.

portion

2



Fontemagna is Blupura's top-of-the-range water cooler, and is the finest encapsulation of Blupura's technology and design. It is available in numerous versions to meet every set of requirements in the catering world.

All Fontemagna models dispense cold still water and cold sparkling water, as well as room-temperature water or water at 95°C (Hot version). The standard-bearer for Blupura quality and success around the world, Fontemagna is a highend water cooler that is unrivalled in terms of innovative, high-tech features and solutions. Just think, for example, of the electronic interface with its touch-sensitive controls. Protected by a glass screen, it is exceptionally easy to use and clean, thus ensuring maximum hygiene. Other features include the high-insulation ice bank, the dual cooling coil (one for still water and the other for sparkling water), and the self-diagnostic and alarm systems. To say nothing of its fully stainless-steel construction, its industry-leading performance and its unmistakable design, which has now become an iconic part of the brand.



| | Lt./h | Price € | fizz | ambient | | hot | Price € | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|----------------------------------|-------|------------|------|---------|---|-----|------------|------------------------------|----------------|-------------------------------|--|
| Fontemagna Steel 80 | 80 | 3.060,00 | | • | ٠ | | ٠ | 520 x 505 x 1450 | 48 | 305 | 2 |
| Fontemagna Steel 80 FIZZ | 80 | 3.990,00 | • | ٠ | ٠ | | ٠ | 520 x 505 x 1450 | 53 | 305 | 2 |
| Fontemagna Steel 150 | 150 | 3.305,00 | | ٠ | ٠ | | ٠ | 520 x 505 x 1450 | 50 | 305 | 2 |
| Fontemagna Steel 150 Fizz | 150 | 4.445,00 | • | ٠ | ٠ | | ٠ | 520 x 505 x 1450 | 55 | 305 | 2 |
| Fontemagna I.T. 80 | 80 | 3.060,00 | | ٠ | ٠ | | ٠ | 520 x 505 x 1450 | 48 | 305 | 2 |
| Fontemagna I.T. 80 Fizz | 80 | 3.990,00 | • | • | ٠ | | ٠ | 520 x 505 x 1450 | 53 | 305 | 2 |
| Fontemagna I.T. 150 | 150 | 3.305,00 | | • | • | | ٠ | 520 x 505 x 1450 | 53 | 305 | 2 |
| Fontemagna I.T. 150 Fizz | 150 | 4.445,00 | • | • | ٠ | | ٠ | 520 x 505 x 1450 | 58 | 305 | 2 |
| Fontemagna Light 3.0 80 | 80 | 2.755,00 | | ٠ | ٠ | | | 520 x 505 x 1450 | 48 | 305 | 2 |
| Fontemagna Light 3.0 80 Fizz | 80 | 3.470,00 | • | ٠ | ٠ | | | 520 x 505 x 1450 | 53 | 305 | 2 |
| Fontemagna Light 3.0 150 | 150 | 3.015,00 | | ٠ | ٠ | | | 520 x 505 x 1450 | 49 | 305 | 2 |
| Fontemagna Light 3.0 150 Fizz | 150 | 3.700,00 | • | ٠ | ٠ | | | 520 x 505 x 1450 | 55 | 305 | 2 |
| Fontemagna Glass 150 Fizz | 150 | 5.020,00 | • | ٠ | ٠ | | ٠ | 520 x 505 x 1450 | 66 | 305 | 2 |
| Fontemagna Hot 80 | 80 | 3.630,00 | | • | • | • | 240,00 | 520 x 505 x 1450 | 50 | 305 | 2 |
| Fontemagna Hot 80 Fizz | 80 | 4.560,00 | • | | • | • | 240,00 | 520 x 505 x 1450 | 54 | 305 | 2 |
| Fontemagna Hot I.T. 150 | 150 | 3.875,00 | | • | • | • | 240,00 | 520 x 505 x 1450 | 56 | 305 | 2 |
| Fontemagna Hot I.T. 150 Fizz | 150 | 5.020,00 | • | | • | • | 240,00 | 520 x 505 x 1450 | 59 | 305 | 2 |

| 0 | ptional | Extras | Price € | Accessories Price € |
|-----------------|-------------------------------------|---|------------|--|
| | Ĕ | Filter + Head | 160,00 | Incremental digital litre-counter 6000R 42,00 |
| In-line filters | or | Osmosis (only for Fontemagna I.T. 150) | 1.380,00 | Decremental digital litre-counter 8000T 42,00 |
| <u> </u> | UV | UV In | 220.00 | Mechanical litre-counter 50,00 |
| filters | UV | UV Out | 360,00 | DimensionsDimensions W x D x H (mm)Dispensing are He (mm)Fontemagna Floorstanding520 x 505 x 1450305 |
| Outlet filters | or nano silver pipe | Nano Silver Pipe | 72,00 | |
| Reducers | | Water pressure reducer (supplied as standard for the 150 Lt/h.) | 46,00 | |
| Redu | | CO ₂ pressure reducer with 2 pressure gauge (only for Fizz models) | 98,00 | |
| Other | RUPROTECTION | Bluprotection | 30,00 | |
| Ot | 10 Kg ← cm 56 → | Deeper version for 10 kg cylinders. | 180,00 | |
| Т | echnica | al profile | | emagna |

| recrimical prome | Fontemagna Steel 80 Fizz I.T. 80 Fizz light 3.0 80 Fizz | Steel 150 Fizz I.T. 150 Fizz light 3.0 150 Fizz Glass 150 Fizz Vending 150 Fizz | Fontemagna Hot I.T. 80 Fizz | Fontemagna Hot I.T. 150 Fizz |
|----------------------------------|--|---|---|---|
| Cooling capacity | 80 (Lt/h.) | 150 (Lt/h.) | 80 - <mark>16</mark> (Lt/h.) | 150 - <mark>16</mark> (Lt/h.) |
| Temperature of cold water* | 5° - 12° C | 5°-12°C | 5°-12°C | 5° - 12° C |
| Ice Bank capacity (Lt) | 14 | 18 | 14 | 18 |
| Ice Bank (Kg) | 5 | 8 | 5 | 8 |
| Cooling technology | Ice Bank Single Stainless Steel coil | Ice Bank Double Stainless Steel coil | Ice Bank Single Stainless Steel coil | Ice Bank Double Stainless Steel coil |
| Cold water coil | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 |
| Max. hot water temperature | - | - | 95°C | 95°C |
| Boiler capacity | - | - | 3 Lt. | 3 Lt. |
| Cooling | Forced ventilation | Forced ventilation | Forced ventilation | Forced ventilation |
| Adjustable thermostat | Yes | Yes | Yes | Yes |
| Refrigerant gas | HC R290 | HC R290 | HC R290 | HC R290 |
| Professional carbonation pump | Rotary | Rotary | Rotary | Rotary |
| Power supply | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz |
| Power consumption | 530W - 2.3A | 920W - 4A | 565W - 6.8A | 196W - 8.5A |
| Ambient cooling temperature | Min 5°C – Max 35°C | Min 5°C - Max 35°C | Min 5°C - Max 35°C | Min 5°C – Max 35°C |
| Materials | All robust Stainless steel and aluminum parts | All robust Stainless steel and aluminum parts | All robust Stainless steel and aluminum parts | All robust Stainless steel and aluminum parts |

*estimated at an ambient temperature of 25 $^{\circ}\text{C}$ and an incoming water temperature of 20 $^{\circ}\text{C}$

Fontemagna VENDING







49

The professional "crossover" solution between a water cooler and a water vending machine.

ELECTRONIC DISPLAY CONTROL PANEL, CARD READER WITH RFID SYSTEM

A microprocessor controls the dispensing system, the unit status and the number of liters dispensed, indicating the type of water selected and its availability. The user interface is extremely simple, clear and functional.

Dimensions and technical specifications: see p. 47

LOW-VOLTAGE VANDAL-RESISTANT **BUTTONS**

The high-quality steel buttons for the selection of cold still water or cold sparkling water are programmable to control the dispensing of a specific quantity of water.

- Functionality with customizable RFID cards.
- Dispenses 150 liters/hour of cold still and cold sparkling water.
- Single dispenser.
- R290 natural refrigerant.

| | Price € | | ambient | Cold XX | portion control | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|--------------------------------|------------|---|---------|---------|--------------------|------------------------------|----------------|-------------------------------|--|
| Fontemagna Vending 150 | 4.735,00 | | ٠ | • | • | 520 x 505 x 1450 | 55 | 305 | 2 |
| Fontemagna Vending 150 Fizz | 5.680,00 | ٠ | | • | • | 520 x 505 x 1450 | 58 | 305 | 2 |

¹ Information not valid for shipments by air

| С | ptional | Extras | Price € | Accesso | ries | Price € |
|-----------------|------------------------|---|------------|------------|---|------------|
| In-line filters | | Filter + Head | 160,00 | | Incremental digital litre-counter 6000R | 42,00 |
| In-line | UV | UV In | 220.00 | | Decremental digital litre-counter 8000T | 42,00 |
| Outlet filters | Or | UV Out | Pipe 24,00 | | Mechanical litre-counter | 50,00 |
| Outle | nano silver pipe | Nano Silver Pipe | | | Pre-paid blank RFID CARD, | 2 000 00 |
| Reducers | | CO2 pressure reducer with 2 pressure gauge (only for Fizz models) | 98,00 | | 1000 pieces Pre-paid RFID CARD with logo, front/ | 3.800,00 |
| | | Bluprotection | 30,00 | LOGO | back 4-colour printing, 1000 pieces | 4.600,00 |
| Other | 10 Kg ← cm 56 → | Deeper version for 10 kg cylinders. | 180,00 | | Print matrix (first time only) | 640,00 |
| | | Coin box | 400,00 | \bigcirc | RFID card loader | 920,00 |

Fontemagna Compact

> GAS R290

ICE BANK 150 t/h

80 It/h



......

) blupura

stainless STEEL

aluminum

touch screen

(I.T.)

portion

energy saving





A combination of Power and Technology, all the advantages of Fontemagna in a compact countertop model. Space saving without compromise!

Fontemagna Compact is available in an I.T. version and a version with touch screen controls. Despite its small footprint, it boasts the following features:

- Just 59 cm deep, including the drip tray (also available with an outlet, on request).
- Convenient opening from above
- Internal space to house
 the filter cartridge

Fontemagna Compact touch screen version

 Portion Control comes as standard on all models, whereas the water pressure reducer comes as standard only on the 150Lt/h versions.



Fontemagna Compact I.T.

with stainless-steel buttons

| | Lt./h | Price € | (| ambient | | portion | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|-------------------------------------|-------|------------|---|---------|---|---------|------------------------------|----------------|-------------------------------|--|
| Fontemagna Compact 80 | 80 | 2.755,00 | | • | • | ٠ | 455 x 600 x 512 | 40 | 305 | 4 |
| Fontemagna Compact | 80 | 3.445,00 | • | • | • | • | 455 x 600 x 512 | 43 | 305 | 4 |
| Fontemagna Compact 150 | 150 | 2.990,00 | | • | • | • | 455 x 600 x 512 | 45 | 305 | 4 |
| Fontemagna Compact NSF 150 Fizz | 150 | 3.875,00 | • | • | • | • | 455 x 600 x 512 | 48 | 305 | 4 |
| Fontemagna Compact I.T. 80 | 80 | 2.755,00 | | • | • | • | 455 x 600 x 512 | 40 | 305 | 4 |
| Fontemagna Compact I.T. 80 Fizz | 80 | 3.445,00 | • | • | • | • | 455 x 600 x 512 | 43 | 305 | 4 |
| Fontemagna Compact I.T. 150 | 150 | 2.990,00 | | • | • | • | 455 x 600 x 512 | 45 | 305 | 4 |
| Fontemagna Compact I.T. 150 Fizz | 150 | 3.875,00 | • | • | • | • | 455 x 600 x 512 | 48 | 305 | 4 |

| С | ptional | Extras | | Price € | Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) |
|-------------------------------|------------------------------|--|----------------------------------|--------------------------|--------------------|-----------------------------------|----------------------------|
| In-line filters | | Filter + Head | | 160,00 | Fontemagna Compact | 455x 600 x 512 | 305 |
| In-line | | UV In | | 220.00 | | | |
| Outlet filters | UV | UV Out | | 360,00 | | | 1 |
| Outle | or nano silver pipe | Nano Silver Pipe | | 72,00 | | | |
| Reducers | | Water pressure rec (comes as standard on the 150 Lt/h. v | d | 46,00 | | | |
| Red | OFF- | CO ₂ pressure redu gauge (only for Fiz | cer with 2 pressure z models) | 98,00 | | - W | _ _ |
| Other | RUPROTECTION | Bluprotection | | 30,00 | | - D | - |
| А | ccessor | ries | | Price € | | | |
| [| | Incremental digital | litre-counter 6000R | 42,00 | | | |
| | | Decremental digita | al litre-counter 8000T | 42,00 | H He | | |
| | 0000 | Mechanical litre-co | ounter | 50,00 | | | |
| ٢ | 8 | Fontemagna Comp tray outlet | pact | 30,00 | | | |
| T | Technica | al profile | Fontemagna Fontemagna (| | | na Compact 15 I Compact I.T. 1 | |
| Cod | oling capacity | | 8 | 80 (Lt/h.) | | 150 (Lt/h.) | |
| Temperature of cold water* 50 | | °-12°C | | 5° - 12° C | | | |
| lce | Bank capacity | y (Lt) | | 14 | | 18 | |
| | Bank (Kg) | | | 5 | | 8 | |
| | oling technolo | рду | Ice Bank – Sin | - | | Double Stainless St | |
| Cold water coil Stainles | | s steel AISI 3 | 16 Stain | Stainless steel AISI 316 | | | |

| Cooling technology | Ice Bank – Single Stainless Steel coil | Ice Bank – Double Stainless Steel coil |
|-------------------------------|---|---|
| Cold water coil | Stainless steel AISI 316 | Stainless steel AISI 316 |
| Cooling | Forced ventilation | Forced ventilation |
| Adjustable thermostat | Yes | Yes |
| Refrigerant gas | HC R290 | HC R290 |
| Professional carbonation pump | Membrane | Rotary |
| Power supply | 230 V - 50 Hz | 230 V - 50 Hz |
| Power consumption | 530 W - 2,3A | 920 W - 4A |
| Ambient cooling temperature | Min 5°C - Max 35°C | Min 5°C - Max 35°C |
| Materials | All robust Stainless steel and aluminum parts | All robust Stainless steel and aluminum parts |

*estimated at an ambient temperature of 25 $^{\circ}\text{C}$ and an incoming water temperature of 20 $^{\circ}\text{C}$

PANTAREI








A great classic delivering professional performance

Don't call it a "public drinking fountain", because its eco-friendly gas, sparkling water, high construction quality and myriad optional extras make this model perfect for gyms, schools and large offices.

- Stainless-steel cabinet and drainer.
- Ventilated condenser.
- Removable rear panel. • Exclusive FIZZ version
- with sparkling water.
- Internal space for 2kg CO₂ cylinders.
- Thermostat to adjust the temperature.


Heavy Duty Faucets As standard, the high-quality "professional school faucet"





| | Lt./h | Price € | fizz | cold x x x | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|------------------|-------|------------|------|------------|------------------------------|----------------|-------------------------------|--|
| Pantarei 20 | 20 | 955,00 | | • | 310 x 310 x 1270 | 22 | 220 | 6 |
| Pantarei 20 Fizz | 20 | 1.800,00 | • | • | 310 x 310 x 1270 | 24 | 220 | 6 |
| | | | | | | | | |

| Technical profile | Pantarei 20 Fizz |
|-------------------------------|--------------------------------------|
| Cooling capacity | 20 (Lt/h.) |
| Temperature of cold water* | 5° - 12° C |
| Cooling technology | Direct-cooling Tank (4Lt.) |
| Cold water coil | Stainless steel AISI 316 |
| Cooling | Forced ventilation |
| Adjustable thermostat | Yes |
| Refrigerant gas | HC R290 |
| Professional carbonation pump | Membrane |
| Power supply | 230 V - 50 Hz |
| Power consumption | 185W - 0,8A |
| Ambient cooling temperature | Min 5°C - Max 35°C |
| Materials | Parts made of robust stainless steel |



| ¹ Information not valid for shipments by air | | | | | | | | |
|---|--------------|---|--------|--|--|--|--|--|
| 0 | ptional | Price € | | | | | | |
| In-line filters | | Filter + Head | 160,00 | | | | | |
| In-line | UV | UV In | 220,00 | | | | | |
| cers | | Water pressure reducer | 46,00 | | | | | |
| Reducers | | CO ₂ pressure reducer with 2 pressure gauge (only for Fizz models) | 98,00 | | | | | |
| Other | BUPROTECTION | Bluprotection | 30,00 | | | | | |
| Accessories Price € | | | | | | | | |
| (| 30,00 | | | | | | | |
| ٦ | 160,00 | | | | | | | |

alarm

Incremental digital

litre-counter 6000R

| | ⊥ u ⊔ D | uu ├W | | Decremental digital litre-counter 8000T |
|------------|------------------------------|----------------------------|------|--|
| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) | | Mechanical |
| Pantarei | 310 x 310 x 1270 | 220 | 0000 | litre-counter |

*estimated at an ambient temperature of 25°C and an incoming water temperature of 20°C

42,00

42,00

50,00







The cooler with audiovisual screen for information and advertising ... it's perfect for gyms and large offices.

Fitted with either 1 or 3 stainless-steel buttons, it can dispense either just one type of cold water or three different types (cold still, cold sparkling and room temperature).

Dimensions


BCC

Fitted with stainless-steel buttons (VANDAL-RESISTANT IP65) it is entirely constructed from stainless steel with stain-resistant treatment. Comes with remote control for the supplied monitor.



| | Lt./h | Price € | | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|----------|-------|------------|-----|------------------------------|----------------|-------------------------------|--|
| ВСС | 30 | 2.270,00 | | • 400 x 400 x 1318 | 30 | 308 | 4 |
| BCC Fizz | 30 | 2.845,00 | • • | 400 x 400 x 1318 | 34 | 308 | 4 |

| Technical profile | BCC Fizz |
|-------------------------------|--|
| Cooling capacity | 30 (Lt/h.) |
| Temperature of cold water* | 5° - 12° C |
| Ice Bank capacity (Lt) | 4 |
| Ice Bank (Kg) | 1,5 |
| Cooling technology | Ice Bank – Single Stainless Steel coil |
| Cold water coil | Stainless steel AISI 316 |
| Cooling | Forced ventilation |
| Adjustable thermostat | Yes |
| Refrigerant gas | HC R290 |
| Professional carbonation pump | Membrane |
| Power supply | 230 V - 50 Hz |
| Power consumption | 230 W - 1A |
| Ambient cooling temperature | Min. 5°C – Max. 35°C |
| Materials | Robust stainless-steel construction, thermoplastic recess |

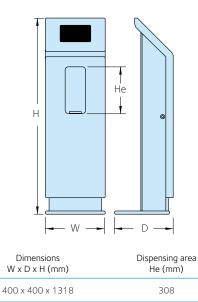

| 0 | ptional | Extras | Price € |
|-----------------|------------------------|---|------------|
| And the filters | | Filter + Head | 160,00 |
| In-line | UV | UV In | 220,00 |
| Outlet filters | UV out | UV Out | 150,00 |
| Outlet | nano silver pipe | Nano Silver Pipe | 24,00 |
| ers | | Water pressure reducer | |
| Reducers | | CO2 pressure reducer (only for Fizz models) | 98,00 |
| Other | BLUPROTECTION | Bluprotection | 30,00 |
| А | ccessor | ies | Price € |
| | | Housing for CO2 cylinder | 280,00 |
| ٦ | TANK () | 5 Lt. tank with re-fill alarm (only with tank compartment | 160,00 |
| | | Incremental digital litre-counter 6000R | 42,00 |
| | | Decremental digital litre-counter 8000T | 42,00 |
| | eC10 | Mechanical litre-counter | 50,00 |

¹ Information not valid for shipments by air

*estimated at an ambient temperature of 25°C and an incoming water temperature of 20°C

BOX





Every Blupura undercounter cooler can be complemented by original Blupura dispensing heads, all of which feature stylish designs, top-quality construction and exceptional performance or by mechanical taps.

All the power for every requirement! Everything you could ever need... The Blupura BOX is an understated, functional presence within the units of any kitchen or in the coffee-break area of any office. This intelligent, spacesaving solution leaves visible only the dispensing point and can be combined with any type of tap. All of the BOX models stand out thanks to the following features:

- Interior easy to inspect.
- Made entirely from stainless steel.
- Professional,
- stainless-steel carbonator.
- Pump protection system in the absence of the water supply.





| | | Lt./h | Price € | fizz | ambient | | hot | Dimensions W x D x H (mm) | Weight (kg) | Products per EURO PALLET ¹ |
|-------------------------|-------------|-------|------------|------|---------|---|-----|------------------------------|----------------|--|
| Piccola Box 15 Fizz | NSF | 15 | 1.220,00 | • | ٠ | ٠ | | 240x398x420 | 17,7 | 18 |
| BluSoda Box 30 | W | 30 | 1.050,00 | | ٠ | ٠ | | 260 x 416 x 416 | 22 | 12 |
| BluSoda Box 30 Fizz | NSF W | 30 | 1.480,00 | • | • | • | | 260 x 416 x 416 | 25 | 12 |
| BluSoda Box Hot 30 | | 30 | 1.410,00 | | • | • | • | 260 x 416 x 416 | 24 | 12 |
| BluSoda Box Hot 30 Fizz | NSF | 30 | 1.840,00 | • | | • | • | 260 x 416 x 416 | 26 | 12 |
| BluSoda Box 45 | Waerlass | 45 | 1.395,00 | | • | • | | 318 x 440 x 467 | 28 | 12 |
| BluSoda Box 45 Fizz | NSE W | 45 | 1.825,00 | • | • | • | | 318 x 440 x 467 | 31 | 12 |
| BluSoda Box Hot 45 | | 45 | 1.760,00 | | • | • | • | 318 x 440 x 467 | 29 | 12 |
| BluSoda Box Hot 45 Fizz | | 45 | 2.190,00 | • | | • | • | 318 x 440 x 467 | 32 | 12 |
| Box 60 | Waterias | 60 | 1.235,00 | | • | ٠ | | 318 x 335 x 467 | 20 | 12 |
| Box 60 Fizz | NSF W | 60 | 1.870,00 | • | • | ٠ | | 318 x 335 x 467 | 22 | 12 |
| Box Hot 60 | | 60 | 1.600,00 | | • | • | • | 318 x 335 x 467 | 22 | 12 |
| Box Hot 60 Fizz | NSF | 60 | 2.230,00 | • | | • | • | 318 x 335 x 467 | 24 | 12 |
| Box 80 | NSE W | 80 | 1.465,00 | | • | • | | 318 x 457 x 467 | 25 | 8 |
| Box 80 Fizz | NSE Westlas | 80 | 2.040,00 | • | • | • | | 318 x 457 x 467 | 29 | 8 |
| Box 150 | NSE W | 150 | 1.925,00 | | • | • | | 475 x 458 x 520 | 30 | 4 |
| Box 150 Fizz | NSE W | 150 | 2.645,00 | • | • | • | | 475 x 458 x 520 | 33 | 4 |
| Box 280 | NSE W | 280 | 2.875,00 | | • | ● | | 578 x 759 x 717 | 78 | 1 |
| Box 280 Fizz | NSF ⊻ | 280 | 3.585,00 | • | | • | | 578 x 759 x 717 | 83 | 1 |

| С | ptional Extras | Price € | Accessories | Price € |
|-----------------|--|------------|---|----------------------|
| In-line filters | Filter + Head | 160,00 | Incremental digital litre-counter 6000R | 42,00 |
| In-line | UV In | 220.00 | | |
| Seducers | Water pressure reducer (comes as standard on the 150 and 280 Lt/h. versions) | 46,00 | Decremental digital litre-counter 8000T | 42,00 |
| Redu | CO ₂ pressure reducer with 2 pressure gauge (only for Fizz models) | 98,00 | | |
| Pump | Recycling pump (comes as standard on the 280 Lt/h. versions) | 60,00 | Mechanical litre-counter | 50,00 |
| Other | Bluprotection | 30,00 | | Soo pages |
| Oth | Water Block (essential for proper installation) | 38,00 | Dispensing heads | See pages 66 - 79 |


| Dimensions | Dimensions W x D x H (mm) |
|----------------|------------------------------|
| Piccola Box 15 | 240 x 398 x 420 |
| BluSoda Box 30 | 260 x 415 x 416 |
| BluSoda Box 45 | 318 x 440 x 468 |
| Box 60 | 318 x 335 x 467 |
| Box 80 | 318 x 457 x 467 |
| Box 150 | 475 x 458 x 520 |
| Box 280 | 578 x 759 x 717 |


Piccola Box 15






Blusoda Box **30** Blusoda Box Hot **30**







Blusoda Box **45** Blusoda Box Hot **45**







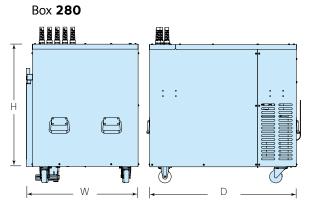

| Technical profile | Piccola Box 15 Fizz | BluSoda Box 30 Fizz | BluSoda Box Hot 30 Fizz | BluSoda Box 45 Fizz | BluSoda Box Hot 45 Fizz |
|-------------------------------|---|---|---|---|---|
| Cooling capacity | 15 (Lt/h.) | 30 (Lt/h.) | 30 - <mark>8</mark> (Lt/h.) | 45 (Lt/h.) | 45 - <mark>8</mark> (Lt/h.) |
| Temperature of cold water* | 5°-12° C | 5°-12° C | 5°-12° C | 5°-12° C | 5°-12° C |
| Ice Bank capacity (Lt) | - | - | - | - | - |
| lce Bank (Kg) | - | - | - | - | - |
| Cooling technology | BDC | Aluminium fusion block | Aluminium fusion block | Aluminium fusion block | Aluminium fusion block |
| Cold water coil | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 |
| Max. hot water temperature | - | - | 95°C | - | 95°C |
| Boiler capacity | - | - | 1 Lt. | - | 1 Lt. |
| Cooling | Forced ventilation | Forced ventilation | Forced ventilation | Forced ventilation | Forced ventilation |
| Adjustable thermostat | Yes | Yes | Yes | Yes | Yes |
| Refrigerant gas | HC R600a | HC R290 | HC R290 | HC R290 | HC R290 |
| Professional carbonation pump | Membrane | Membrane | Membrane | Membrane | Membrane |
| Power supply | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz |
| Power consumption | 170W - 1,00A | 210W - 0,9A | 1220W - 5,3A | 275W - 1,2A | 1285W - 5,6A |
| Ambient cooling temperature | Min 2°C Max 35°C | Min 5°C Max 35°C | Min 5°C Max 35°C | Min 5°C Max 35°C | Min 5°C Max 35°C |
| Materials | Parts made of robust stainless steel and ABS plastic. | Parts made of robust stainless steel |

| Technical profile | Box 60 Fizz | Box Hot 60 Fizz | Box 80 Fizz | Box 150 Fizz | Box 280 Fizz |
|-------------------------------|---|---|---|---|--|
| Cooling capacity | 60 (Lt/h.) | 60 - <mark>8</mark> (Lt/h.) | 80 (Lt/h.) | 150 (Lt/h.) | 280 (Lt/h.) |
| Temperature of cold water* | 5°-12° C |
| Ice Bank capacity (Lt) | 7 | 7 | 14 | 18 | 90 |
| lce Bank (Kg) | 3 | 3 | 5 | 8 | 35 |
| Cooling technology | lce Bank – Single Stainless Steel coil | Ice Bank – Single Stainless Steel coil | Ice Bank – Single Stainless Steel coil | Ice Bank - Double Stainless Steel coil | Ice Bank – Double Stainless Steel coil |
| Cold water coil | Stainless steel AISI 316 |
| Max. hot water temperature | - | 95°C | - | - | - |
| Boiler capacity | - | 1 Lt. | - | - | - |
| Cooling | Forced ventilation |
| Adjustable thermostat | Yes | Yes | Yes | Yes | Yes |
| Refrigerant gas | HC R290 |
| Professional carbonation pump | Membrane | Membrane | Rotary | Rotary | Rotary |
| Power supply | 230 V - 50 Hz |
| Power consumption | 300W - 1,3A | 1210 W - 5,25A | 505 W - 2,2A | 875W - 3,8A | 1265W - 5,5A |
| Ambient cooling temperature | Min 5°C Max 35°C |
| Materials | Parts made of robust stainless steel | Parts made of robust stainless steel | Parts made of robust stainless steel | Parts made of robust stainless steel | Parts made of robust stainless steel and galvanised sheet steel |

INSTAFizz





Blupura's professional carbonator is ideal for bars that have a cold-water inlet.

• Professional 1-liter carbonator.

Dimensions

InstaFizz

- Compact design, made from stainless steel.
- $\boldsymbol{\cdot}$ Rapid, easy installation for use in any environment.

The perfect solution for dispensing sparkling water at the inlet temperature. It can be used in combination with an external cooler and can be connected to all types of faucets.



¹ Information not valid for shipments by air



| Technical profile | InstaFizz | 0 | ptional | Extras | Price € |
|------------------------------|-----------------|-----------------|---------------|--|-------------|
| Carbonator capacity | 1 Lt | | Ě | Filter + Head | ح 160,00 |
| Professional carbonator pump | 200 lt/h | In-line filters | UV | UV In | 220,00 |
| Supply | 230 V - 50 Hz | Reducers | | Water pressure reducer | 46,00 |
| Power | 370 W - 1,6 A | Redu | | CO2 pressure reducer (only for Fizz models) | 98,00 |
| Materials | Stainless steel | Other | BLUPROTECTION | Bluprotection | 30,00 |
| | | Ę | | Water Block | |

Dimensions W × D × H (mm)

| Other | BLUPROTECTION | Bluprotection | 30,00 |
|-------|---------------|---|-------------------------|
| Oth | | Water Block (essential for proper installation) | 38,00 |
| A | ccessor | ies | Price € |
| | | Incremental digital litre-counter 6000R | 42,00 |
| | | Decremental digital litre-counter 8000T | 42,00 |
| | 6 | Mechanical litre-counter | 50,00 |
| | | Dispensing heads | See pages 66 - 79 |

*estimated at an ambient temperature of 25 $^{\circ}\text{C}$ and an incoming water temperature of 20 $^{\circ}\text{C}$

166 x 439 x 417

blusev/en






Modern design and high technology, with 7 different dispensing options.

Design, unrivalled build quality, high performance and high technology, perfect for integrating with other units in the kitchen, BluSeven is a 7-way dispenser. 5 are dedicated to filtered water: room temperature, cold still, cold slightly sparkling, cold sparkling, hot (95°C with safety control); 2 are for non-filtered water - hot and cold.



| | Price € | fizz | medium | ambient | | hot | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|-------------------|------------|------|--------|---------|---|-----|------------------------------|----------------|-------------------------------|--|
| BluSeven Fizz | 1.720,00 | • | • | • | • | | 180 x 255 x 455 | 5,9 | 284 | 28 |
| BluSeven Hot Fizz | 1.790,00 | • | ٠ | ٠ | ٠ | • | 180 x 255 x 455 | 5,9 | 284 | 28 |

¹ Information not valid for shipments by air

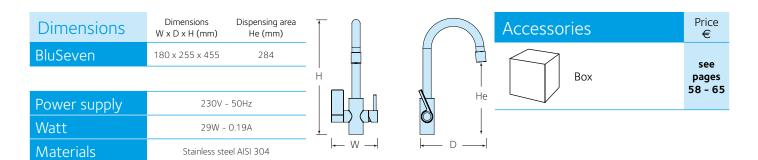









A unique, innovative design for the wall dispenser, which can be attached individually or in series.

Made from stainless steel and anodised aluminium, with stainless-steel buttons, this elegant unit provides exceptional functionality for offices, homes and prestigious apartment blocks.


Wall

Also perfect for schools, hospitals and wherever floorstanding coolers cannot be installed for safety reasons. Available with 1 or 2 dispensing buttons, and even in a built-in version.



| | Price € | fizz | cold | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ |
|------------------------------|------------|------|------|------------------------------|----------------|-------------------------------|--|
| WALL 1 push button | 865,00 | | • | 273 x 114 x 900 | 7 | 290 | 8 |
| WALL 2 push buttons | 1.035,00 | • | • | 273 x 114 x 900 | 7 | 290 | 8 |
| WALL BUILT IN 1 push button | 865,00 | | • | 306 x 110 x 545 | 7 | 285 | 8 |
| WALL BUILT IN 2 push buttons | 1.035,00 | • | • | 306 x 110 x 545 | 7 | 285 | 8 |

¹ Information not valid for shipments by air

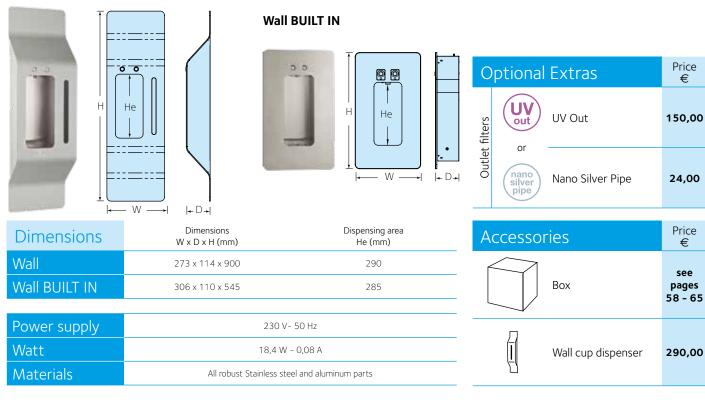







A professional faucet for those who love design but have limited space available. The perfect combination of style and performance.

Complete with portion control and made entirely from stainless steel (including the buttons), it can be combined with any type of undercounter model.

It dispenses two types of water: cold still and cold sparkling, or cold still and room-temperature still. BLUTOWER is also available with three dispensing buttons in the MIX version (cold, semi-sparkling and sparkling water) and the HOT version (cold still, cold sparkling and hot water). Optional extras include: • Drip tray




| | Price € | fizz | ambient mediun | | hot portion control Price € | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | Products per EURO PALLET ¹ | |
|--------------------------------|------------|------|----------------|---|---|------------------------------|----------------|-------------------------------|--|--|
| BLU TOWER 2 push buttons | 835,00 | • | | ٠ | 240,00 | 146 x 146 x 444 | 8 | 322 | 45 | |
| BLU TOWER 3 push buttons | 925,00 | • | • | • | 240,00 | 146 x 146 x 444 | 8 | 322 | 45 | |
| BLU TOWER MIX | 980,00 | • | • | ٠ | | 146 x 146 x 444 | 8 | 322 | 45 | |
| BLU TOWER HOT | 995,00 | • | | ٠ | • | 146 x 146 x 444 | 8 | 322 | 45 | |
| BLU TOWER BLACK 2 push buttons | 975,00 | • | | ٠ | 240,00 | 146 x 146 x 444 | 8 | 322 | 45 | |
| BLU TOWER BLACK 3 push buttons | 1.060,00 | • | • | ٠ | 240,00 | 146 x 146 x 444 | 8 | 322 | 45 | |
| BLU TOWER BLACK MIX | 1.115,00 | • | • | • | | 146 x 146 x 444 | 8 | 322 | 45 | |
| BLU TOWER BLACK HOT | 1.130,00 | • | | • | • | 146 x 146 x 444 | 8 | 322 | 45 | |

Drip tray

B B B B B B





| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) | | |
|----------------|------------------------------|----------------------------|--|--|
| BluTower | 146 x 146 x 444 | 322 | | |
| BluTower Black | 146 x 146 x 444 | 322 | | |
| | | | | |
| Alimentazione | 230 V | /- 50 Hz | | |
| Watt | 35 W | - 0,15 A | | |
| Materiali | Robust st | ainless steel | | |

| otional | Extras | Price € |
|-------------------------------|------------------|---------------------|
| UV | UV Out | 150,00 |
| or (nano silver pipe | Nano Silver Pipe | 24,00 |
| | or | or Nano Silver Pipe |

¹ Information not valid for shipments by air

| Accessories | Price € |
|-------------|-------------------------|
| Вох | see pages 58 - 65 |
| Drip tray | 78,00 |

blugass Tower







All the charm of Bluglass with a minimal footprint on the counter? This is the faucet for those who want beauty and unbeatable performance.

Tempered glass, stainless steel and the unmistakable elegance of the Bluglass line in a faucet that catches your eye and then wins you over with its unrivaled functionality. Available with customizable Portion Control, thanks to its integrated electronics it can be operated quickly and comfortably. It comes with the Drip Tray included.



| | Price € | fizz | ambient | Cold | hot | Price € | Dimensions W x D x H (mm) | Weight (kg) | Dispensing area He (mm) | per EURO PALLET ¹ |
|------------------------|------------|------|---------|------|-----|------------|------------------------------|----------------|-------------------------------|------------------------------------|
| BLUGLASS Tower ONE 2W | 827,00 | • | | • | | 240,00 | 142 x 209 x 455 | 8 | 260 | 24 |
| BLUGLASS Tower ONE 3W | 880,00 | • | • | • | | 240,00 | 142 x 209 x 455 | 8 | 260 | 24 |
| BLUGLASS Tower ONE Hot | 960,00 | • | | • | • | | 142 x 209 x 455 | 8 | 260 | 24 |
| BLUGLASS Tower 2W | 1.007,00 | • | | • | | 240,00 | 227 x 209 x 514 | 8 | 319 | 24 |
| BLUGLASS Tower 3W | 1.060,00 | • | • | • | | 240,00 | 227 x 209 x 514 | 8 | 319 | 24 |
| BLUGLASS Tower Hot | 1.067,00 | • | | • | • | | 227 x 209 x 514 | 8 | 319 | 24 |





| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) | | |
|------------------------|------------------------------|----------------------------|--|--|
| Bluglass Tower ONE 2W | 142 x 209 x 455 | 260 | | |
| Bluglass Tower ONE 3W | 142 x 209 x 455 | 260 | | |
| Bluglass Tower ONE Hot | 142 x 209 x 455 | 260 | | |
| Bluglass Tower 2W | 227 x 209 x 514 | 319 | | |
| Bluglass Tower 3W | 227 x 209 x 514 | 319 | | |
| Bluglass Tower Hot | 227 x 209 x 514 | 319 | | |
| | | | | |
| Power supply | 230 V - | - 50 Hz | | |
| Watt | 30 W - 0,19 A | | | |
| Materials | Robust stainless stee | l and tempered glass | | |

¹ Information not valid for shipments by air

Products

Diananaina

| 0 | ptional | Extras | Price € |
|----------------|---------|--|-------------------------|
| (1 | | UV Out (Bluglass Tower) | 240,00 |
| Outlet filters | or | UV Out (Bluglass Tower ONE) | 150,00 |
| Outlet | nano | Nano Silver Pipe (Bluglass Tower) | 48,00 |
| | silver | Nano Silver Pipe (Bluglass Tower ONE) | 24,00 |
| А | ccessoi | ries | Price € |
| | | Box | see pages 58 - 65 |

Fontemagna Bridge

DIUPL





The revolutionary supply head that can be fitted to all under-counter models, combining practicality and efficiency.

Fontemagna Bridge is the choice for those who want high performance in the smallest possible space. Connected to the under-counter box, which can also be installed in another space, it offers the same features as a large floor-standing cooler: portion control, anti-bacterial UV lamp at the outlet of each faucet, multiple dispensing. Entirely made of aluminum and stainless steel, it has protected 3-way faucets. The drip-tray is included.



| | | Ũ | | | | \bigcirc | | | He (mm) | PALLET ¹ |
|--------------------------|-----|----------|---|---|---|------------|-----------------|----|---------|---------------------|
| Fontemagna BRIDGE | NSE | 1.985,00 | ٠ | ٠ | ٠ | ٠ | 360 x 290 x 605 | 15 | 306 | 6 |
| Fontemagna BRIDGE I.T. | NSF | 1.985,00 | • | • | • | ٠ | 360 x 290 x 605 | 15 | 306 | 6 |

¹ Information not valid for shipments by air

| | W | | Optional Extras | Price € |
|--------------|------------------------------|----------------------------|----------------------|------------------|
| | | | Outlet filters or | 360,00 |
| | | He | Nano Silver Pipe | 72,00 |
| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) | Accessories | Price € |
| Bridge | 360 x 290 x 605 | 306 | | |
| | | | | see |
| Power supply | 230 V- 5 | 50 Hz | Box | pages 58 - 65 |
| Watt | 50 W - 0 | ,20 A | | 50-05 |
| Materials | All robust Stainless steel | and aluminum parts | | |

TOP CONTROL







The sleekest countertop dispenser, made from stainless steel and featuring a touch screen and dual, dispensing outlets!

Smaller footprint, greater functionality: a valid new alternative to replace traditional, manual "beer-style" taps on the counter. Convenience and design for a product that comes complete with a drip tray.

TOP CONTROL

Materials

With Portion Control, you can automatically fill up two bottles at once, saving time and lowering cost. The entire electronic section is fitted within a box for positioning under the counter.

Price

€

1.130,00

Н

He

Ø 42 및 ₩

Robust stainless steel

¹ Information not valid for shipments by air

Weight

(kg)

6

Dimensions

W x D x H (mm)

335 x 232 x 435

Dispensing

area

He (mm)

348

Products

per EURO

PALLET¹

30

| Dimensions | Dimensions W x D x H (mm) | Dispensing area He (mm) | Accessories | Price € |
|--------------|------------------------------|----------------------------|-------------|--------------|
| Top Control | 335 x 232 x 435 | 348 | | |
| | | | | |
| Power supply | 230 V- | 50 Hz | Box | see pages |
| Watt | 35 W - | 0,15 A | | 58 - 65 |
| | | | | |

45 MAX

Ø 42

D

portion control


Mechanical taps, trays and various accessories






Accessories

All of the accessories and spare parts can be purchased on our e-commerce site: ecommerce.blupura.com

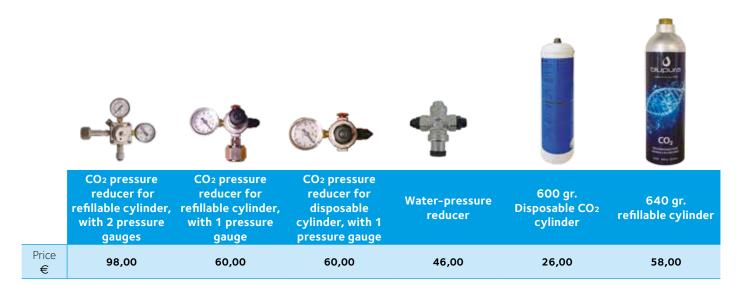



Sanitising and cleaning

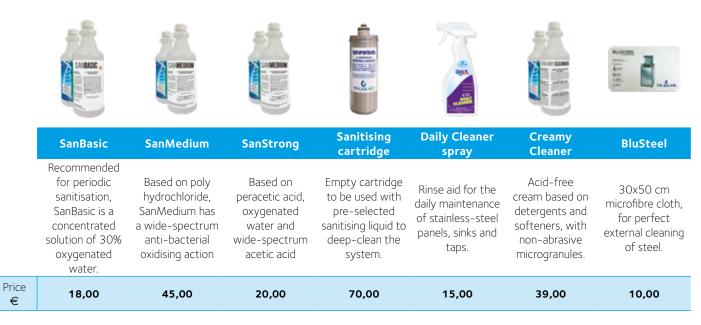


€



Water Bottles

...leg Plastic Coo/

Those who choose a high-quality Blupura cooler do so because they love efficiency, service and design. For this reason, Blupura does not just offer you water in the best, most efficient way - we also offer you a series of bottles all of which feature unique, customisable designs, to allow you to bring your water to the table or take it with you wherever you go.

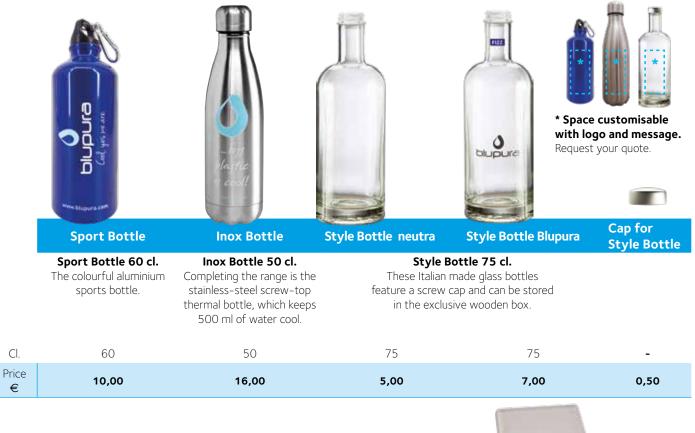

Blank Wooden Box with **Basket for** Trolley Lid **Wooden Box BluPura logo** bottle-washer Bottle-washing basket The universal basket for professional catering dishwashers. Maximum capacity: 25 bottles. Max diameter: 8.7 cm. Dimensions WxDxH (mm) Basket: 500x500x308 - Lid: 500x500x24 - Trolley: 543x543x203 Price 70,00 70,00 110,00 38,00 196,00 €

Warranty terms

Blupura Srl Blupura Srl guarantees that, prior to their shipment, its refrigeration and carbonation units are subject to rigorous checks that ensure the units comply with the highest standards of quality and are free from defects in terms of their materials and construction. Blupura Srl undertakes to repair, free of charge, the units at its plant and/or to replace any components that demonstrate manufacturing defects for a period of 24 (twenty-four) months from the date on which the relevant invoice is issued to the retailer; the retailer provides the legal warranty to the consumer. Blupura Srl shall not reimburse the costs of work incurred by the purchaser for repairs to the units. Blupura Srl must be informed of the presence of defects within 8 (eight) days of their detection; beyond this time limit, the warranty conditions shall not be applicable.

The warranty does not cover those parts subject to wear-and-tear under normal conditions of use or damaged as a result of neglect. The warranty is not applicable to any units that have been subject to tampering or deterioration for reasons not attributable to Blupura Srl; nor does it cover any units that are used for applications that are incompatible with or contrary to the usage limits prescribed by the regulations and/or shown on our technical documentation. Since the installation, associated operations, electrical connections and commissioning of the units are carried out by the installer, the warranty provided by Blupura Srl concerns only the individual units sold and not the complete installation or system. Any modification made to the original product as sold by Blupura Srl or any installation not envisaged in the enclosed manual shall automatically result in the withdrawal of any approval marks, the certifications and the warranty itself provided by Blupura Srl, which, consequently, shall accept no liability in relation to any products that have been subject to modifications or installations not envisaged by the manual.

Blupura Srl accepts no liability for any damages that may, directly or indirectly, be caused to third parties as a result of failure to comply with the instructions provided in the appropriate user manual and relating in particular to the installation, use and maintenance of the product.

This warranty absorbs and replaces all other warranties and liabilities, both contractual and noncontractual, pursuant to the applicable laws in relation to the products supplied, with the express exclusion of any liability on the part of Blupura Srl in relation to indirect, incidental or consequential damages that may arise from faults or from the defective and/or non-compliant nature of the product supplied. **RETURNS AND REPAIRS** – In order to use the returns and repair service, please contact Customer Service and request a return merchandise authorisation (RMA), which must be enclosed with the shipment. The Customer Service team will supply authorisation for the return of the goods. If you are not a direct customer,

the product return must be carried out via the retailer. The retailer is liable for the cost of shipping the goods back to Blupura Srl. For repairs carried out under warranty only. Blupura Srl shall be liable for the cost

repairs carried out under warranty only, Blupura Srl shall be liable for the cost of the return shipment on completion of the repairs. For repairs not carried out within the warranty period, the standard payment terms shall apply as defined in the contractual conditions of sale upon issuing of the invoice. Units returned for repair outwith the warranty period shall be covered by a 12 (twelve) month warranty, applicable only to the replaced and/or repaired components, starting from the date of repair. The repair of units under warranty does not connote in any case the extension of the warranty beyond the 24 (twenty-four) month limit.

| Notes | |
|-------|--|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

| | Notes | |
|---|-------|--|
| - | | |
| - | | |
| - | | |
| - | | |
| - | | |
| - | | |
| - | | |
| - | | |
| - | | |



Blupura S.r.l. : Zona Industriale Squartabue - 62019 Recanati (Mc) - Italy Registered Office: Via Gandolfi, 6 - 40057 Cadriano di Granarolo dell'Emilia (Bo) - Italy Tel. +39 071 971 0080 - Fax +39 071 971 0084 - info@blupura.com Blupura Usa - 1200 Brickell Ave, Suite 1950 - Miami (FL) 33131 - USA - Tel. +1 305 777 3591 - blupurausa@blupura.com

www.blupura.com